

Please type a plus sign (+) inside this box [+]

PTO/SB/05 (12/97)  
Approved for use through 09/30/00. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 74451.P093

Total Pages 2

First Named Inventor or Application Identifier Toru Matsuda

Express Mail Label No. EL164804184US

PTO  
09/19/97  
JCS23 U.S.

11/12/98

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, D. C. 20231

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification (Total Pages 44)  
(preferred arrangement set forth below)
  - Descriptive Title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claims
  - Abstract of the Disclosure
3. ☒ Drawings(s) (35 USC 113) (Total Sheets 10)
4. ☒ Oath or Declaration (Total Pages 4)
  - a. ☐ Newly Executed (Original or Copy)
  - b. ☐ Copy from a Prior Application (37 CFR 1.63(d))  
(for Continuation/Divisional with Box 17 completed) (**Note Box 5 below**)
  - i. ☐ DELETIONS OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

### ACCOMPANYING APPLICATION PARTS

8. \_\_\_\_\_ Assignment Papers (cover sheet & documents(s))  
9. \_\_\_\_\_ a. 37 CFR 3.73(b) Statement (where there is an assignee)  
\_\_\_\_\_ b. Power of Attorney  
10. \_\_\_\_\_ English Translation Document (if applicable)  
11. \_\_\_\_\_ a. Information Disclosure Statement (IDS)/PTO-1449  
\_\_\_\_\_ b. Copies of IDS Citations  
12. \_\_\_\_\_ Preliminary Amendment  
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)  
14. \_\_\_\_\_ a. Small Entity Statement(s)  
\_\_\_\_\_ b. Statement filed in prior application, Status still proper and desired  
15. \_\_\_\_\_ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. Other: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

\_\_\_\_\_ Continuation \_\_\_\_\_ Divisional \_\_\_\_\_ Continuation-in-part (CIP)  
of prior application No: \_\_\_\_\_

### 18. Correspondence Address

\_\_\_\_\_ Customer Number or Bar Code Label \_\_\_\_\_  
(Insert Customer No. or Attach Bar Code Label here)  
or

☒ Correspondence Address Below

NAME Michael J. Mallie, Reg. No. 36,591   
BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP

ADDRESS 12400 Wilshire Boulevard  
Seventh Floor

CITY Los Angeles STATE California ZIP CODE 90025-1026

Country U.S.A. TELEPHONE (408) 720-8598 FAX (408) 720-9397

## FEE TRANSMITTAL

**TOTAL AMOUNT OF PAYMENT (\$)1256.00**

Complete if Known:

Application No. \_\_\_\_\_

Filing Date November 12, 1998

First Named Inventor Toru Matsuda

Group Art Unit \_\_\_\_\_

Examiner Name \_\_\_\_\_

Attorney Docket No. 74451.P093

### METHOD OF PAYMENT (check one)

1. ☐ The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:

Deposit Account Number 02-2666

Deposit Account Name \_\_\_\_\_

- ☒ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17

- ☐ Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance, 37 CFR 1.131(b)

2. ☒ Payment Enclosed

☒ Check

\_\_\_\_\_ Money Order

\_\_\_\_\_ Other

### FEE CALCULATION (fees effective 10/01/97)

#### 1. FILING FEE

| Large Entity |          | Small Entity |          | Fee Description                    | Fee Paid        |
|--------------|----------|--------------|----------|------------------------------------|-----------------|
| Fee Code     | Fee (\$) | Fee Code     | Fee (\$) |                                    |                 |
| 101          | 790      | 201          | 395      | Utility application filing fee     | <u>\$790.00</u> |
| 106          | 330      | 206          | 165      | Design application filing fee      | _____           |
| 107          | 540      | 207          | 270      | Plant filing fee                   | _____           |
| 108          | 790      | 208          | 395      | Reissue filing fee                 | _____           |
| 114          | 150      | 214          | 75       | Provisional application filing fee | _____           |

**SUBTOTAL (1) \$ 790.00**

#### 2. CLAIMS

|                           |           |      | Extra |           | Fee from below |                | Fee Paid          |
|---------------------------|-----------|------|-------|-----------|----------------|----------------|-------------------|
| Total Claims              | <u>30</u> | - 20 | =     | <u>10</u> | X              | <u>\$22.00</u> | = <u>\$220.00</u> |
| Independent Claims        | <u>6</u>  | - 3  | =     | <u>6</u>  | X              | <u>\$82.00</u> | = <u>\$246.00</u> |
| Multiple Dependent Claims |           |      | =     | <u>0</u>  | X              | _____          | = _____           |

| Large Entity |          | Small Entity |          | Fee Description   | Fee Paid        |
|--------------|----------|--------------|----------|---|-----------------|
| Fee Code     | Fee (\$) | Fee Code     | Fee (\$) |   |                 |
| 103          | 22       | 203          | 11       | Claims in excess of twenty                              | <u>\$220.00</u> |
| 102          | 82       | 202          | 41       | Independent claims in excess of 3                       | <u>\$246.00</u> |
| 104          | 270      | 204          | 135      | Multiple dependent claim                                | _____           |
| 109          | 82       | 209          | 41       | Reissue independent claims over original patent         | _____           |
| 110          | 22       | 210          | 11       | Reissue claims in excess of 20 and over original patent | _____           |

**SUBTOTAL (2) \$ 466.00**

12/01/97

# **FEE CALCULATION (continued)**

## **3. ADDITIONAL FEES**


| <u>Large Entity</u>       |                 | <u>Small Entity</u> |                 | <u>Fee Description</u>   | <u>Fee Paid</u> |
|---------------------------|-----------------|---------------------|-----------------|--|-----------------|
| <u>Fee Code</u>           | <u>Fee (\$)</u> | <u>Fee Code</u>     | <u>Fee (\$)</u> |  |                 |
| 105                       | 130             | 205                 | 65              | Surcharge - late filing fee or oath  | _____           |
| 127                       | 50              | 227                 | 25              | Surcharge - late provisional filing fee or cover sheet                     | _____           |
| 139                       | 130             | 139                 | 130             | Non-English specification  | _____           |
| 147                       | 2,520           | 147                 | 2,520           | For filing a request for reexamination                                     | _____           |
| 112                       | 920*            | 112                 | 920*            | Requesting publication of SIR prior to Examiner action                     | _____           |
| 113                       | 1,840*          | 113                 | 1,840*          | Requesting publication of SIR after Examiner action                        | _____           |
| 115                       | 110             | 215                 | 55              | Extension for response within first month                                  | _____           |
| 116                       | 400             | 216                 | 200             | Extension for response within second month                                 | _____           |
| 117                       | 950             | 217                 | 475             | Extension for response within third month                                  | _____           |
| 118                       | 1,510           | 218                 | 755             | Extension for response within fourth month                                 | _____           |
| 128                       | 2,060           | 228                 | 1,030           | Extension for response within fifth month                                  | _____           |
| 119                       | 310             | 219                 | 155             | Notice of Appeal   | _____           |
| 120                       | 310             | 220                 | 155             | Filing a brief in support of an appeal                                     | _____           |
| 121                       | 270             | 221                 | 135             | Request for oral hearing   | _____           |
| 138                       | 1,510           | 138                 | 1,510           | Petition to institute a public use proceeding                              | _____           |
| 140                       | 110             | 240                 | 55              | Petition to revive unavoidably abandoned application                       | _____           |
| 141                       | 1,320           | 241                 | 660             | Petition to revive unintentionally abandoned application                   | _____           |
| 142                       | 1,320           | 242                 | 660             | Utility issue fee (or reissue)   | _____           |
| 143                       | 450             | 243                 | 225             | Design issue fee   | _____           |
| 144                       | 670             | 244                 | 335             | Plant issue fee  | _____           |
| 122                       | 130             | 122                 | 130             | Petitions to the Commissioner  | _____           |
| 123                       | 50              | 123                 | 50              | Petitions related to provisional applications                              | _____           |
| 126                       | 240             | 126                 | 240             | Submission of Information Disclosure Stmt                                  | _____           |
| 581                       | 40              | 581                 | 40              | Recording each patent assignment per property (times number of properties) | _____           |
| 146                       | 790             | 246                 | 395             | For filing a submission after final rejection (see 37 CFR 1.129(a))        | _____           |
| 149                       | 790             | 249                 | 395             | For each additional invention to be examined (see 37 CFR 1.129(a))         | _____           |
| Other fee (specify) _____ |                 |                     |                 |  | _____           |
| Other fee (specify) _____ |                 |                     |                 |  | _____           |

**SUBTOTAL (3)\$ 0** \_\_\_\_\_

\*Reduced by Basic Filing Fee Paid

## **SUBMITTED BY:**

Typed or Printed Name: Michael J. Mallie

Signature  Date 4/12/92

Reg. Number 36,591 Deposit Account User ID \_\_\_\_\_

(complete if applicable)

UNITED STATES PATENT APPLICATION

for

METHOD AND APPARATUS FOR AUTOMATIC NETWORK CONFIGURATION

Inventors:  
Toru Matsuda  
Kurt Piersol  
Shinsuke Teramura  
Akio Urabe  
Tatsuya Inagaki

prepared by:

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP  
12400 Wilshire Boulevard  
Los Angeles, CA 90025-1026  
(408) 720-8598

File No.: 74451.P093

"Express Mail" mailing label number: EL164804184US

Date of Deposit: November 12, 1998


I hereby certify that I am causing this paper or fee to be deposited with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above and that this paper or fee has been addressed to the Assistant Commissioner for Patents, Washington, D. C. 20231

Cindy Murphy

(Typed or printed name of person mailing paper or fee)

(Signature of person mailing paper or fee)

(Date signed)

  
November 12, 1998

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The present invention relates generally to a method and apparatus for automatically configuring a network. More particularly, the present invention relates to a dynamically configurable network architecture containing networked office appliances (NOAs).

### 2. Background

Generally, before a device can operate in a networked environment, the device needs to be appropriately configured. The specific network configuration required for each device may vary depending upon factors such as network topology and device functionality. On a Transmission Control Protocol / Internet Protocol (TCP/IP) network, each device or host is assigned a unique identifier known as an IP address. IP addresses usually take the form of a 32-bit numeric address written as four numbers separated by periods, but may differ depending upon the particular network topology. More information regarding IP address formatting can be found in Request For Comments (RFC) 1700, "Assigned Numbers", October 1994.

Prior to establishing communication with a host across a TCP/IP network, the individual initiating the communication determines the IP address of the destination host much like telephone numbers are used when placing telephone calls. Individuals do not always know a recipient's IP address, and unfortunately there is no simple way of ascertaining it. Fortunately, however, mechanisms such as domain names have been developed which allow for simplified network communication.

Domain names were introduced as a less complicated means for users to communicate with remote hosts. Background information and specifications regarding domain names can be found in RFC 1034, "Domain Names - Concepts and Facilities", November 1987, and a companion RFC 1035, "Domain Names -

Implementation and Specification", November 1987. In its simplest form, a domain name is nothing more than a human-readable text representation of one or more unique numeric IP addresses. By using domain names, users are not required to memorize numerous awkward IP addresses in order to communicate with hosts, rather they need only remember the appropriate host's domain name.

Furthermore, most domain names reflect some variation of their corresponding hosts' names, and thus act as mnemonics for the user. Because the Internet is based upon IP addressing and not domain names, however, network devices replace every host domain name with the host's corresponding IP address prior to initiating communication. This replacement process is facilitated by what is known as a domain name service (DNS).

Figure 1 illustrates a conventional DNS configuration according to the prior art. Referring to Figure 1, client 100 transmits the domain name 102 of the host 115 that client 100 wishes to contact over network 101 to DNS server 120. DNS server 120 performs a lookup function in its database 118 and retrieves a corresponding IP address 103 to return to the client 100. Client 100 is then free to establish communication with host 115 using the host's corresponding IP address 103.

It is not uncommon for a single host domain name to be linked to multiple IP addresses within a DNS server. If one or more of a host's IP addresses are changed or are removed from the network, the corresponding DNS entries also need to be changed or removed from the DNS database. One limitation of DNS has historically been its inability to automatically update such address changes. Currently, it is common for DNS updates to be performed manually, often requiring time consuming, meticulous precision. Such manual updates, however, are not limited to just DNS databases. Essential configuration information such as IP addresses have traditionally been assigned to hosts manually as well.

Manual IP address assignments are most often performed by an experienced individual such as a network administrator. The network administrator assigns each host an IP address chosen from a block of addresses known by the administrator to be available. If the administrator were to mistype the IP address when configuring the host, it is likely that the host would not function correctly. Similarly, if the administrator were to assign a previously allocated IP address to a host, communication errors would likely occur due to the conflicting IP addresses. Additional TCP/IP configuration information other than IP addresses is often manually entered as well. Often, the TCP/IP configuration process requires an administrator to visit each host individually to enter the applicable information. Every time a host configuration is subsequently changed, the administrator must also visit the host to perform the update. On large networks, this practice of manually updating configurations can be extremely time consuming.

Dynamic IP address allocation attempts to solve some of the problems created by manual host configuration. Different implementations of dynamic IP address allocation have been proposed over time, but one common protocol used today is the Dynamic Host Configuration Protocol (DHCP). For more information on DHCP, see RFC 2131, "Dynamic Host Configuration Protocol", March 1997. DHCP is based on the Bootstrap Protocol (BOOTP), but adds the capability of automatic allocation of reusable network addresses and additional configuration options. For more information on BOOTP, see RFC 951, "Bootstrap Protocol (BOOTP)", September 1985. DHCP provides a framework for passing configuration information to hosts on a TCP/IP network at boot time. With DHCP, a network administrator does not need to visit each host individually to configure or modify a host's configuration. A configuration may include the host IP address and other TCP/IP option settings such as the definitions of domain name servers, default gateways and subnet masks. Some DHCP server implementations allow for the use of option sets, which allow



administrators to assign common settings to particular options. When an administrator makes a change to an option set, all client configurations employing that option set will receive the updated information. In this manner, central administration is made easier.

Figure 1 illustrates a conventional DHCP configuration according to prior art. Referring to Figure 1, upon commencing its bootstrap routine, a DHCP client 100 sends out a DHCP Discover broadcast 105 across network 101 looking for a DHCP server 110 or 111 that can return settings to client 100. Both operational DHCP servers 110 and 111 on network 101 receive the DHCP Discover broadcast 105 from client 100 and determine if they can provide configuration information for that particular client 100. If the DHCP servers 110 and 111 have a configuration for the requesting client 100, they send a DHCP Offer 106 to the DHCP client 100 over network 101. DHCP client 100 analyzes all of the DHCP Offers 106 it has received from DHCP Servers 110 and 111, selects one of the servers, and sends back a DHCP Request 107 over network 101 to the server it chooses, such as DHCP server 110. DHCP server 110 issues a DHCP Acknowledgment 108 to client 100, reserves an IP address, and subsequently delivers the configuration information to client 100 over network 101.

One current problem with networks utilizing DHCP in conjunction with DNS involves the lack of communication between the two systems. As IP addresses are dynamically allocated to hosts, corresponding domain names may also be allocated. In a network where a host's IP address changes frequently, so too will its domain name. Due to the randomness involved in such address/domain name assignments, it is crucial that such assignments be reflected in a DNS. Since DNS updates are often completed manually, it is unlikely, however, that the DNS will reflect the most recent host address/domain name information available. If the DNS is not kept up to date with the most recent host address/domain name

assignments, communication between hosts may become increasingly difficult. Even if a DNS database was kept up to date with the most recently available network address/domain name information, it would still be advantageous to identify a single host by a single fixed domain name. With a single fixed domain name, any particular host would always be reachable via that domain name, regardless of what the host's dynamically assigned IP address is.

It is therefore desirable to have a system that is able to dynamically allocate IP addresses to a host, while statically assigning a single domain name to that host. Such a system would perform necessary DNS updates automatically, requiring minimal human interaction with the system, thereby minimizing communication errors.

Once a device is configured, and connected to a network, the network administrator is generally responsible for updating user and group information and allocating access privileges to that device. As the size of the network, number of connected devices, and number of users grows, the process of updating user and group information and granting access privileges can become a formidable task. Often in large office environments, user and group information updates are not considered critical to the functionality of the network and may therefore be assigned a lower priority than other, more urgent system concerns. In small office environments designated network administrators may not even exist, leaving all of the network configurations and administration to be completed by untrained individuals. Such a practice may not only affect productivity, but may also jeopardize the functionality of the network.

It is therefore desirable to have a network device that provides easy, comfortable, and appliance-like automatic configuration features to users. Such a device should be capable of automatically configuring itself for network operation when placed in a network environment that lacks a designated administrator, and

at the same time, the device should provide interoperability with preexisting networked equipment when placed in an administered network environment.

## SUMMARY OF THE INVENTION

A method and apparatus for initializing a first device on a network is disclosed. First, configuration information is requested from a second device upon connecting the first device to the network. Then, the initialization process is delayed for a period of time. Next, configuration services are provided to the network if a response to the configuration information request is not received from the second device within the period of time that the initialization process is delayed. Configuration services are provided to the network if the first device has a higher priority than the second device. The network is continuously monitored to detect a connection of an additional device to the network.

## BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood more fully from the detailed description given below and from the accompanying drawings of various embodiments of the invention, which, however, should not be taken to limit the invention to the specific embodiments, but are for explanation and understanding only.

**Figure 1** illustrates a conventional non-NOA network including dynamic host configuration protocol and domain name service servers according to prior art.

**Figure 2** illustrates one embodiment of a client NOA architecture.

**Figure 3** illustrates one embodiment of a client NOA configuration flow diagram.

**Figure 4** illustrates one embodiment of a server NOA architecture.

**Figure 5** illustrates one embodiment of a client NOA configuration flow diagram.

**Figure 5A** illustrates an alternative embodiment of a client NOA configuration flow diagram.

**Figure 6** illustrates a flow diagram of one embodiment of a NOA successful boot procedure.

**Figure 6A** illustrates a flow diagram of one embodiment of a NOA graceful shutdown procedure.

**Figure 7** illustrates one embodiment of a NOA name and address management flow diagram.

**Figure 8** illustrates a flow diagram of one embodiment of a NOA password distribution routine.

## DETAILED DESCRIPTION

A networked office appliance (NOA) architecture is disclosed. In the following description, numerous specific details are set forth such as specific components, configurations, connections, etc., in order to provide a thorough understanding of the present invention. It will be apparent, however, to one skilled in the art that these specific details need not be employed to practice the present invention. In other instances, well known components or methods have not been described in detail in order to avoid obscuring the present invention.

Some portions of the detailed descriptions which follow are presented in terms of algorithms and symbolic representations of operations on data bits within a computer memory. These algorithmic descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. An algorithm is here, and generally, conceived to be a self-consistent sequence of steps leading to a desired result. The steps are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated. It has proven convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities. Unless specifically stated otherwise as apparent from the following discussions, it is appreciated that throughout the present invention, discussions utilizing terms such as "processing" or "computing" or "calculating" or "determining" or "displaying" or the like, refer to the action and processes of a computer system, or similar electronic computing device, that

manipulates and transforms data represented as physical (electronic) quantities within the computer system's registers and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission or display devices.

5       The present invention also relates to apparatus for performing the operations herein. This apparatus may be specially constructed for the required purposes, or it may comprise a general purpose computer selectively activated or reconfigured by a computer program stored in the computer. Such a computer program may be stored in a computer readable storage medium, such as, but is not limited to, any type of  
10 disk including floppy disks, optical disks, CD-ROMs, and magneto-optical disks, read-only memories (ROMs), random access memories (RAMs), EPROMs, EEPROMs, magnetic or optical cards, or any type of media suitable for storing electronic instructions, and each coupled to a computer system bus. The algorithms and displays presented herein are not inherently related to any particular computer  
15 or other apparatus. Various general purpose machines may be used with programs in accordance with the teachings herein, or it may prove convenient to construct more specialized apparatus to perform the required processing. The required structure for a variety of these machines will appear from the description below. In addition, the present invention is not described with reference to any particular  
20 programming language. It will be appreciated that a variety of programming languages may be used to implement the teachings of the invention as described herein.

Although all or some of the operations may be performed by software executing on one or more processing units/devices (e.g., CPUs) in a computer  
25 system or specialized apparatus, some or all of these operations may be performed by digital logic and/or circuitry, an integrated circuit (e.g., ASIC) or other semiconductor substrates.

## Overview

A NOA architecture allows appliances to be added to a network without requiring configuration or setup in offices lacking a network administrator. At the same time, a NOA architecture allows appliances to be easily added to standard administered networks without causing conflicts with preexisting network devices. Furthermore, NOAs work closely together in networked environments and are able to automatically detect and share information with one another upon being connected to a network. Some examples of networked office appliances may include, but are not limited to devices such as facsimile machines, copiers, printers, personal computers, scanners, electronic typewriters, data backup systems, control units, . . .etc.

A NOA architecture provides mechanisms for automatically configuring devices on networks, such as TCP/IP networks. Specific configuration methods disclosed herein include network address allocation, DNS database population, network service discovery, and user identity sharing. Devices that follow these algorithms automatically start DHCP and DNS services when they are not already present on a network, and refrain from doing so if such services are already present on a network. Both DHCP and DNS services work together to provide names and addresses to network devices on the same network without human intervention (automatically). In addition, a hypertext transfer protocol (HTTP) based method of securely sharing service information as well as user and group information is defined.

The disclosed architecture and system differ from the prior art by way specific mechanisms are used to configure a network. One such mechanism provides for the detection of existing DNS and DHCP services on a network, while another mechanism controls a device's response when such services are detected. If DHCP and DNS services are detected on a network an NOA device may startup as a client



and accept any configuration information offered by the services. If, however, a NOA device does not detect DHCP and DNS services, the NOA device may startup as a server to provide those services to the network. A NOA architecture uses a combination of state variables, timing, and communication protocols to accomplish these tasks.

Service discovery is accomplished within the disclosed automatic network configuration. A designated service device utilizes a unique protocol to gather individual service lists from multiple NOA devices on a network. In doing so, the service device creates a master service list accessible by all NOA devices on the network. In this way, each NOA device is able to identify the services that every other NOA device on the network provides.

User and group information is shared across an automatically configured network. User and group information is information that designates which users are allowed access to an NOA device, as well as what level of access they are allowed. A NOA architecture utilizes a unique protocol in conjunction with the HTTP protocol to pass user and group information between NOA devices. When a NOA device is connected to an automatically configured network, user and group information is passed to that NOA device. NOA devices are able to detect whether the user and group information they are passed is more or less recent than any preexisting user and group information they may already contain. A further mechanism is provided which allows an NOA device to pass the more recent user and group information back to the originating device so that the information may be propagated throughout the network.

NOA architecture provides a further mechanism for solving network name conflicts in the automatically configured network herein described. Since NOA devices are capable of selecting their own network name to which they are assigned, the possibility exists that more than one NOA will select the same name. If this

occurs, NOA devices resolve the conflict using a novel conflict resolution process which makes the selected network names unique, yet consistent.

The following sections will further detail the specific mechanisms and protocols utilized in a NOA architecture.

#### Client NOA Configuration

Figure 2 illustrates one embodiment of a NOA architecture. Referring to Figure 2, client NOA 200 is connected to network 201. Network 201 may represent the Internet, an intranet, or any other interconnected data path across which multiple devices may share information. Host 202 is a non-NOA networked device that may be connected to network 201, as is non-NOA server 210. Non-NOA server 210 may or may not provide DHCP or equivalent services to network 201. It will be appreciated that any number of hosts 202 or non-NOA servers 210 may be connected to network 201.

Figure 3 is a flow diagram of one embodiment of a client NOA network configuration. Referring to Figure 3, upon commencing its bootstrap sequence, client NOA 200 attempts to obtain necessary configuration information required for client NOA 200 to function correctly on network 201. Using DHCP protocol, client NOA 200 broadcasts a DHCP Discover (processing block 322) across network 201 every interval time D until either client NOA 200 receives a DHCP Offer (processing block 326), or a predefined amount of time allotted for a DHCP response expires (processing block 330). The specific delay interval time D at processing block 324 is a measure of time between which successive DHCP Discovers are broadcast at processing block 322. The delay interval time D is alterable as is the predefined amount of time that client NOA 200 will wait for a DHCP Offer at processing block 326. If non-NOA server 210 is configured to provide DHCP services to network 201, non-NOA server 210 responds to client NOA 200 with a DHCP Offer, offering the needed configuration information to client NOA 200. If for any reason, client NOA

200 does not approve of the configuration information offered by non-NOA server 210, client NOA 200 does not send a DHCP Request at processing block 327, but rather issues a DHCP Decline to non-NOA server 210 at processing block 332. Client NOA 200 continues to broadcast DHCP Discovers at processing block 322 until either  
5 another DHCP Offer is received at processing block 326, or a predefined amount of time allocated for a DHCP response expires at processing block 330. If, however, client NOA 200 approves of the configuration information offered by non-NOA server 210, client NOA 200 requests the offered configuration information by sending a DHCP Request to non-NOA server 210 at processing block 327. If the  
10 configuration information offered to client NOA 200 is still valid and available, non-NOA server 210 transmits a DHCP Acknowledge to client NOA 200 which is received at processing block 328, reserves an IP address for client NOA 200, and begin to transfer the agreed upon configuration information over network 201 to client NOA 200. In this way client NOA 200 may continue to boot successfully at  
15 processing block 329. Note that the information may not be valid and available, for instance, when the same address has been offered to several hosts and one of the hosts accepts. At this point, the other offers are no longer valid.

If, for any reason, a DHCP Acknowledge is not received by client NOA 200 at processing block 328, client NOA 200 continues to broadcast DHCP Discovers at  
20 processing block 322 until either another DHCP Offer is received at processing block 326, or a predefined amount of time allocated for a DHCP response expires at processing block 330.

In one embodiment, non-NOA server 210 is not configured to provide DHCP or equivalent services to network 201. In this case, client NOA 200 broadcasts a  
25 DHCP Discover across network 201 and delays for a specified interval time D at processing block 324 before broadcasting subsequent DHCP Discovers across network 201. Eventually an error condition is triggered at processing block 331 after the

predefined amount of time allocated for a DHCP response expires at processing block 330. Once an error condition is triggered, a user or administrator may be alerted by an audio or visual notification indicating that automatic configuration was not possible. A visual error notification may be displayed on any display device that may or may not be connected to the network including a Cathode Ray Tube (CRT). Error condition notifications may alternatively be archived onto a magnetic media in the form of an error log for later retrieval and inspection by an administrator.

In one embodiment, at least two non-NOA servers 210 are connected to network 201 and at least two of these non-NOA servers 210 are configured to provide DHCP services to network 201. Using the DHCP protocol, client NOA 200 broadcasts a DHCP Discover across network 201 at processing block 322, every interval time D until either client NOA 200 receives a DHCP Offer in response at processing block 326, or a predefined amount of time allotted for a DHCP response expires at processing block 330. Non-NOA servers 210 that are configured to provide DHCP services and are able to provide client NOA 200 with configuration information respond to client NOA 200 with a DHCP Offer. If client NOA 200 receives multiple DHCP Offers at processing block 326 from multiple non-NOA servers 210, client NOA 200 determines whether it will accept a configuration and if so, which one of the multiple configurations received it will accept. If client NOA 200 chooses to decline all configurations, client NOA 200 will issue DHCP Declines at processing block 332 to all the non-NOA servers that originated the configurations. Client NOA 200 continues to broadcast DHCP Discovers at processing block 322 until either a more acceptable DHCP Offer is received at processing block 326, or a predefined amount of time allocated for a DHCP response expires at processing block 330. If, however, client NOA 200 chooses to accept one of the configurations offered by one of the non-NOA servers 210, client NOA 200 issues a DHCP Request at processing block 327 to the appropriate non-NOA server

210 that originated the acceptable DHCP Offer. Client NOA 200 issues DHCP Declines at processing block 332 to all non-NOA servers 210 that originated unacceptable DHCP Offers.

It will be appreciated that multiple client NOAs 200 may be connected to network 201. In such an instance, where multiple client NOAs are connected to a single network, the configuration process of any particular client NOA may be identical to the configuration process disclosed for a single client NOA.

Although the configuration is described with respect to a DHCP protocol, other protocols having similar functionality may be used.

#### NOA Server Self Identification

In one embodiment, networks containing client NOA devices contain two or more NOA server devices. These NOA servers provide configuration services, such as DNS, DHCP, service discovery, and user management features to networks containing client NOAs, and are capable of managing which NOA server will be given priority over the remaining NOA servers at any given time. The NOA server with the highest priority is given the designation of master server and supplies the bulk of the configuration services to the NOA network.

NOA servers are capable of determining whether a device is currently providing configuration services to a network or whether configuration services are required by the network. When an NOA server is connected to a network, the server broadcasts a DHCP Discover across the network. If the NOA server does not receive a DHCP Offer in response to the DHCP Discover, it is likely that no other device is providing configuration services to the network. In such a case, the NOA server begins to provide configuration services to the network. If, however, the NOA server receives a DHCP Offer in response to the DHCP Discover, it is likely that a second device is already providing configuration services to the network. If

the NOA server determines that the second device providing configuration services to the network is not a NOA server, the NOA server does not provide similar configuration services, but rather behaves like a client NOA instead. If the NOA server determines that the second device is a NOA server, however, the two NOA servers determine which of them has the higher priority. The NOA server with the higher priority is designated as master server and the server with the lower priority is designated as client NOA. In some circumstances, two NOA servers may not be able to determine which NOA server should be the master server, thereby requiring user intervention. In one embodiment, such circumstances very rarely occur.

In one embodiment, NOA servers capable of providing configuration services to a network are referred to as server NOAs. Server NOA's use a combination of state variables, timing, and communications to accomplish the task of self-identification reliably without user intervention. Server NOAs are generally assigned one of the following four states: 1) Initial, 2) Master, 3) Not\_Master, and 4) Temporary\_Master. The "Initial" state is assigned to server NOAs when the devices are first manufactured. The state of "Master" is assigned to any server NOA that provides service to a network. Server NOAs assigned the state of "Not\_Master" are configured to be server NOAs, but at that particular time, do not provide service to the network. Server NOAs assigned the state of "Temporary\_Master" are designed to provide service temporarily when the Master is not available. It is important to determine and capture the previous state of a particular server NOA before bootstrap, as well as the state of the server NOA after bootstrap. In one embodiment, NOA state variables may be defined in an electronic file readable upon bootstrap.

Figure 4 illustrates one embodiment of a server NOA architecture. Referring to Figure 4, server NOA 402 is connected to network 401, where network 401 may represent the Internet, an intranet, or any other interconnected data path across

which multiple devices may share information. Shown optionally connected to network 401 is client NOA 400, user server 404, master server 408, a server NOA that provides service discovery (SNOA) 406, and a non-NOA server 410. Optional connections are indicative of devices that are not required to be connected to network 401 at all times, but may be connected to network 401 in some instances.

Figure 5 illustrates one embodiment of a server NOA self identification routine. Referring to Figure 5, upon commencing its bootstrap sequence, server NOA 402 determines whether it should behave as a server NOA and provide network configuration services to network 401, or whether it should behave as a client NOA and not provide network configuration services to network 401. Such a determination is accomplished by referring to the state variable of server NOA 402. In one embodiment, the state variable is set by the system itself. In one embodiment, a user causes the state variable to be set to the master state by selecting it as the master.

The first inquiry is whether server NOA 402 has a state variable equal to Master at processing block 501. If the state variable of server NOA 402 is equal to Master, server NOA 402 should continue to boot appropriately at processing block 525 providing configuration services to network 401. If the state variable of server NOA 402 is not equal to Master at processing block 501, then the state variable is equal to either Not\_Master, Temporary\_Master, or Initial. Server NOA 402 issues DHCP Discovers across network 401 at processing block 502 every interval time D (504), until either a DHCP Offer is received in response at processing block 506, or a predefined amount of time allotted for a DHCP response expires at processing block 508.

It is important that the amount of time allotted for a DHCP response be varied across multiple server NOAs in order to avoid race conditions between competing DHCP configured servers. If the amount of time allotted for a DHCP

response is kept constant, the server NOAs may not function correctly. For example, if multiple server NOAs exist on a network, and all such server NOAs are turned on simultaneously (such as in the case of recovery from power loss, for example), it is conceivable that all the server NOAs may also send out DHCP

5 Discovers simultaneously. If all the server NOAs send out DHCP Discovers simultaneously, all the server NOAs may also wait to receive a DHCP Offer in return. If all the server NOAs are waiting to receive a DHCP Offer, none of the server NOAs can send an expected DHCP Offer. In such a situation, the predetermined amount of time allotted for a DHCP response may simultaneously  
10 expire on all server NOAs. Furthermore, each server NOA, believing it is alone on the network, may begin to provide configuration services to the network. If the amount of time allotted for a DHCP response is varied, however, it is likely that at least one server NOA will begin to provide configuration services to the network. It is important that the time be varied by an amount larger than the interval at which  
15 DHCP Discovers are repeated. In one embodiment, the variation is in quanta whose size equals the repetition rate. This may be a number of seconds.

Referring back to Figure 5, after it is determined that the state variable of server NOA 402 is not equal to Master at processing block 501, and server NOA 402 has broadcast a DHCP Discover across network 401 at processing block 502, the next  
20 inquiry is to determine whether server NOA 402 receives a DHCP Offer at processing block 506. If server NOA 402 receives a DHCP Offer at processing block 506 before the predefined amount of time allotted for a DHCP response expires at processing block 508, the state variable of server NOA 402 is set to Not\_Master at processing block 510 and server NOA 402 continues to behave like a client NOA at  
25 processing block 511. It is presumed that if server NOA 402 receives a response to its DHCP Discover, there is another device on network 401 providing configuration



services to network 401. In such a case, server NOA 402 does not provide configuration service to network 401 even though it is capable of doing so.

If server NOA 402 does not receive a DHCP Offer at processing block 506 before the predefined amount of time allotted for a DHCP response expires at processing block 508, configuration block 530 is executed. In configuration block 530, the first determination to be made is whether the state variable of server NOA 402 is equal to Initial at processing block 512. If the state variable of server NOA 402 is equal to Initial at processing block 512, and the predefined amount of time allotted for a DHCP response has expired, the state variable of server NOA 402 is set to Master at processing block 520. Server NOA 402 continues to boot appropriately at processing block 525 providing configuration services to network 401. In such a situation, it is likely that server NOA 402 had been in its default shipping state when connected to the network, and no other devices were detected as providing configuration services to network 401.

Referring to configuration block 530 in Figure 5, if the state variable of server NOA 402 is not equal to Master or Initial, and the predefined amount of time allotted for a DHCP response has expired, user intervention may be required at processing block 514. If user intervention is required, a user may be prompted to select whether the appropriate state variable of server NOA 402 is Master, Temporary\_Master, or Not\_Master. There is always the possibility that prior to server NOA 402 being connected to network 401, some other device was providing configuration services to network 401. Such a device may have been turned off accidentally, or it may have encountered a functional problem at some point in time. If the other device malfunctioned and is no longer able to provide configuration services to network 401 for example, a user will be prompted to set the state variable of server NOA 402 to either Master, or Temporary\_Master. If the other device was mistakenly not turned on, a user will be prompted to set the state

variable of server NOA 402 to either Master, Temporary\_Master, or Not\_Master. If the user selects Not\_Master at processing block 518, server NOA 402 again begins to broadcast DHCP Discovers at processing block 502. If the user selects Temporary\_Master, server NOA 402 provides configuration services only until a Master server is found. If the user selects the Master state, server NOA 402 continues to boot at processing block 525 providing configuration services to network 401.

Figure 5A illustrates an alternative embodiment of the server NOA self-identification routine. In Figure 5A, configuration block 530 has been replaced by configuration block 531. Referring to Figure 5A, once it is determined that no DHCP Offer has been received at processing block 506, and the time allotted for a DHCP response has expired at processing block 508, configuration block 531 is executed.

If the previous state variable of server NOA 402 is equal to Not\_Master at processing block 513, the state variable is set to Temp\_Master at processing block 517. If the previous state variable of server NOA 402 is not equal to Not\_Master at processing block 513, a determination is made whether the previous state variable is equal to Initial at processing block 515. If the previous state variable of server NOA 402 is equal to Initial at processing block 515, the state variable is set to Master at processing block 519. If the previous state variable of server NOA 402 is not equal to Initial at processing block 515, server NOA 402 continues to boot appropriately at processing block 525 providing configuration services to network 401.

Once the state variable of server NOA 402 is set appropriately as either Temporary\_Master, or Master at processing blocks 517 and 519 respectively, server NOA 402 continues to boot appropriately at processing block 525. The subsequent boot procedure is illustrated in Figure 6. Referring to Figure 6, server NOA 402 selects an IP address from a pool of IP addresses at processing block 602. In one embodiment, server NOA 402 first attempts to select a previously used IP address if

one exists. After an IP address is selected, server NOA 402 determines at processing block 604 whether the chosen IP address is available for use. In one embodiment, Address Resolution Protocol (ARP) is used to make such a determination. If the address is not available, server NOA 402 selects another IP address from the pool of addresses at processing block 602.

If it is determined that the selected IP address is available, however, server NOA 402 initiates DHCP services at processing block 608, and initiates DNS and service discovery at processing block 610. After the appropriate services have been started, server NOA 402 broadcasts a DHCP Discover across network 401 at processing block 612, and determines whether a DHCP Offer has been received in response to the DHCP Discover at processing block 614. If server NOA 402 detects a DHCP Offer at processing block 614, it is very likely that another device has started providing configuration services to network 401, and server NOA 402 executes graceful shutdown procedure at processing block 616. Conversely, if server NOA 402 does not detect a DHCP Offer at processing block 614, it is very likely that no other server device is providing configuration services to network 401. In that case, server NOA 402 continues to send DHCP Discovers at processing block 612 until a DHCP Offer is received at processing block 614.

DHCP configurations may contain TCP/IP option fields. In an NOA environment, an option field is used to classify server NOAs. A server NOA may be classified as either a High\_Priority\_Server or an Ordinary\_Server. If multiple server NOAs are connected to a network, the server NOA that provides configuration services to the network is designated as High\_Priority\_Server. Server NOAs designated as an Ordinary\_Server function much like client NOAs. There may typically be no more than one High\_Priority\_Server connected to any particular network at any given time. The High\_Priority\_Server may be a user-selected server. An identifier in a field of a DHCP Offer is set or not to indicate

whether or not the server is a High\_Priority\_Server. In one embodiment, the High\_Priority\_Server informs all other servers of its address or identifier.

Figure 6A illustrates one embodiment of a graceful shutdown procedure.

Referring to Figure 6A, the DHCP is informed that no new leases should be granted

5 (processing block 630). A determination is then made as to whether any leases remain unexpired (processing block 632). DHCP leases have time limits, which the NOA keeps relatively short (e.g., one minute). If so, processing loops back to again test whether any leases are still unexpired. If all the leases have expired, the DNS and DHCP are shut down (processing block 634) and the server NOA begins to act as  
10 a DNS/DHCP NOA client (processing block 636).

## Network Address and Name Management

NOA devices employ a method where DHCP and DNS services work together so that the name of a host changes as rarely as possible even if its address changes. A NOA architecture attempts to keep network names consistent and moreover  
5 employs a method of solving network name conflicts. Traditionally, the user or network administrator has been left to assign or change the network name of a host manually in order to avoid naming conflicts. In contrast, a NOA architecture automates these services, thereby decreasing the amount of required user intervention as well as the risk of errors.

10 In one embodiment, the DHCP server is implemented on server NOA 402 and contains a table that records network name conflicts and assignments, also referred to as bindings. The DHCP table keeps track of a device's Media Access Control (MAC) address along with the device's corresponding network name binding. A MAC address is a hardware address that uniquely identifies each node of  
15 a network. It is conceivable that another identifier, other than a device's MAC address, may be used for identification purposes if a different network topology is implemented. Along with a device's MAC address and network, or host name binding, the table also contains fields for such information as the device's IP address as well as a "name\_in\_use" code. The name\_in\_use code, which is initialized  
20 upon bootstrap, indicates whether a particular host name is being used by another device.

Figure 7 illustrates one embodiment of a NOA name and address management flow diagram. Referring to Figure 7, upon commencing its bootstrap sequence, client NOA 400 attempts to retrieve configuration information from  
25 server NOA 402. At processing block 702, client NOA 400 suggests a desirable IP address and host name for server NOA 402 to use in the configuration of client NOA 400. At processing block 704, server NOA 402 acquires the MAC address of

client NOA 400, and at processing block 706 subsequently determines whether that MAC address exists in the DHCP table of server NOA 402. If the MAC address of client NOA 400 does exist in the DHCP table, server NOA 402 retrieves the previous name and address bindings of client NOA 400 at processing block 708. If, however, the MAC address of client NOA 400 does not exist in the DHCP table, server NOA 402 creates an entry for client NOA 400 at processing block 710. At processing block 712, server NOA 402 examines the not\_in\_use field of the DHCP table to determine whether the selected network name of client NOA 400 is already in use by another device. If it is already in use by another device, server NOA 402 will modify the selected network name at processing block 714. After network name modification, server NOA 402 determines whether the newly modified network name is also in use. Server NOA 402 continues to modify and check the network name of client NOA 400 until a suitable name is established. If, at processing block 712, server NOA 402 determines that the network name of client NOA 400 is not already in use, server NOA 402 thereafter determines whether the IP address of client NOA 400 is in use by another device at processing block 720. If the IP address of client NOA 400 is in use by another device, server NOA 402 modifies the IP address for client NOA 400 at processing block 722. After the IP address of client NOA 400 is modified, server NOA 402 determines whether the new IP address is also in use by another device. Server NOA 402 continues to assign and check the network IP address of client NOA 400 in this manner until a suitable IP address is ascertained.

After a suitable network name and network IP address are determined, all the fields in the DHCP table are completed with the appropriate information at processing block 724. At processing block 726, server NOA 402 records a mark in the name\_in\_use field indicating that the network name assigned to client NOA 400 has been taken. In this manner, no other devices may attempt to use this network name while it is assigned to client NOA 400. At processing block 728, the DHCP

server which in this particular embodiment is server NOA 402, informs the DNS server which, in this particular embodiment is also server NOA 402, of the network name and IP address assignments. Server NOA 402 then returns the configuration information to client NOA 400 via a DHCP Offer at processing block 730. Such configuration information may include the client's network name, IP address, domain name, DNS server address, and router address. At processing block 732, server NOA 402 determines whether a DHCP Decline is returned by client NOA 400. If a DHCP Decline is returned, server NOA 402 may alert a user to determine why the configuration was rejected as shown in step 733. As long as no DHCP Decline is received by server NOA 402, it is presumed that client NOA 400 accepts the configuration information and service discovery will begin at processing block 736. Although it has been assumed that the client described within this name and address management configuration procedure is a client NOA, it is also possible that such a configuration procedure would apply to a non-NOA client configured to accept DHCP configurations. If server NOA 402 were to return configuration information to a non-NOA client, service discovery may not be invoked and the name and address configuration procedure would end at processing block 738.

#### Name Modification

When a DHCP client sends the host name to DHCP server, it is possible that the name is already in use. At this time, the DHCP server changes the host name to become unique.

In one embodiment, the following process to resolve host name collisions:

1. If requested name is shorter than a predetermined number of characters, (e.g., 15), then add the number digits to the tail of it.
2. If step 1 is not enough to make unique name, then the last character of the modified name is incremented in the alphabetical order.

3. If the last character was checked through a-z and all of the modification is not unique, then the second character from the end is incremented in the numerical/alphabetical order and the last character is modified to start for 0-9, a-z.
- 5 4. In one embodiment, this process never adds minus or underscores characters.
5. If the original character is a minus or underscore character, the next character is 0.

### Address Ranges

In one embodiment of a NOA, the class A private address range specified by:

10.xxx.yyy.0 ~ 10.xxx.yyy.255

are used.

The section marked "xxx.yyy" is used by the NOA to allow servers to transfer clients smoothly when a new DHCP server takes over from the original NOA server.

The DHCP server allocates client addresses from the following address range.

10.xxx.yyy.100 ~ 10.xxx.yyy.200

This address range contains the address of DHCP server itself, implying that the DHCP server can assign a maximum of 100 addresses. A network administrator wishing to allocate some static addresses, but mostly allow NOAs to configure themselves, can use the following range for static assignments.

10.xxx.yyy.0 ~ 10.xxx.yyy.99

10.xxx.yyy.201 ~ 10.xxx.yyy.255

In one embodiment, the network mask of an automatically configured NOA network is 255.0.0.0.

### Service Discovery

The NOA network architecture provides an automatic service discovery feature. The SNOA server is responsible for providing the service discovery



function to a network. The SNOA server assembles a service list describing service names of each NOA device on the network. Using this service list, each NOA can easily associate itself with other NOAs on the network. A typical SNOA server is a combination of a hypertext transfer protocol (HTTP) daemon and a program that issues HTTP queries. In one embodiment, when automatic configuration is desired, the SNOA server is located on the Master server. In another embodiment, when automatic configuration is not desired, or when the SNOA server is situated in an administered environment, the SNOA server can be located on a separate device other than the Master server.

In one embodiment, a SNOA service list is constructed using human-readable text data. Each line of text resembles the form:  
"service:<servicename>://<FQDN>" where <servicename> represents the type of service a NOA provides, and <FQDN> represents a fully qualified domain name. It is advisable to maintain a naming convention for service names whereas a host name naming convention is not required. In one embodiment, a SNOA server organizes the master service list by requesting each NOA's individual service list using an HTTP query. Both hypertext transfer protocol (HTTP) syntax and service location protocol (SLP) syntax may be utilized to achieve this result. More information on service location protocol (SLP) syntax may be found in RFC 2165, "Service Location Protocol", June 1997.

An example of a HTTP based service list along with service definitions is found below:

#### SERVICE LIST

```
service: doc_capture://archive.<dornain name>
service: doc_retrieval://archive.<domain name>
service: lpr://archive.<domain name>
```

service: lpr://printer.<domain name>  
 service: doc\_retrieval://printer.<domain name>  
 service: fax\_send://fax.<domain name>  
 service: calendar\_schedule://calendar.<domain name>  
 service: calendar\_retrieval://calendar.<domain name>

### SERVICE DEFINITIONS

| <u>Name</u>        | <u>Meaning</u>                         |
|--------------------|--|
| doc_capture        | accepts documents for archiving        |
| doc_retrieval      | allows retrieval of archived documents |
| lpr                | accepts print jobs                     |
| fax_send           | accepts fax pages to send              |
| calendar_schedule  | schedules a calendar entry             |
| calendar_retrieval | retrieves a calendar entry             |

In the above example, a NOA device with service name "doc\_capture" may accept documents over a network for archival purposes. A representative fully qualified domain name (FQDN) could be "archive.<domain name>" where "archive" indicates the NOA device is of an archival type, and "<domain name>" refers to the local domain name of the network to which the NOA device is connected. Similarly, a NOA device named printer that accepts print jobs may provide the service entitled "lpr. A corresponding service list entry may appear as:

{lpr://printer.<domain name>}

Once the SNOA requests each NOA's individual service list using an HTTP query, the respective NOA's should respond. A representative service list that is returned by an NOA in response to the SNOA's query is shown below:

```
service: doc_capture://  
service: doc_retrieval://  
service: lpd://
```

The format of the service list returned by each NOA is similar to the service list of the SNOA although redundant FQDN information is not passed.

In one embodiment, when a client NOA initiates service discovery, the client NOA pushes its own service list to the SNOA server using a HTTP POST command within its bootstrap sequence. Depending upon which device provides DNS and DHCP service to the network, one of two handshaking procedures will commence.

In one embodiment where an NOA device provides a DNS and DHCP service to a network, all the NOA devices on that network are aware that the SNOA server alias is SNOA.DOMAIN by default. If no specific DOMAIN is required, "local" will be used in its place. In such a case, NOAs push their service lists using HTTP POST to the uniform resource locator (URL) shown below:

```
http://SNOA.local/SNOA_service_list
```

In such a situation, "SNOA" is the name of the particular NOA, "local" refers to the current network domain, and "SNOA\_service\_list" is linked to a mechanism that

accepts the service list pushed by the NOAs. A common gateway interface (CGI) program is one mechanism that would achieve the desired result.

In an alternative embodiment, where an existing non-NOA device or multiple devices provide DNS and DHCP service to a network, it is very likely that the network is administered. In such an instance, the network administrator should manually add a DNS entry for the SNOA server as well as the SNOA server's alias to the DNS. It is preferable that the name of the SNOA server be "SNOA" so that other NOA devices can refer to the SNOA server by concatenating "SNOA" and the "DOMAIN" name given by the DHCP server. In the rare circumstance when the name "SNOA" is already used, any name may be chosen as long as all NOA devices are configured to point to the correct URL.

Once a NOA pushes its service list to a SNOA server, the SNOA server registers the service list and remembers the name of the NOA client. When subsequent changes to NOA service take place, the service list maintained in the SNOA server is updated. More specifically, when a new NOA device is added to the network, it pushes its service list to the SNOA server and the SNOA server then distributes this information to all of the other client NOAs that it remembers. It may accomplish this by pushing the clients to the following exemplary URL:

[http://HOST.DOMAIN/NOA\\_service\\_list](http://HOST.DOMAIN/NOA_service_list)

If a network administrator wishes to separate NOAs into several project or organizational work-groups, the administrator can maintain the work-groups by defining respective URLs for the particular SNOA service desired. For example, if the administrator decides to provide a single server for a certain group of NOAs in order to control the service list, the administrator can configure each NOA within the work-group to point to a single URL:

http://SOME\_SERVER.DOMAIN/NOA\_Service\_List\_For\_Workgroup\_3

Similarly, different work-groups may be configured to point to different URLs on a single server:

http://SERVER1.DOMAIN/NOA\_Service\_List\_For\_Workgroup\_4

http://SERVER1.DOMAIN/NOA\_Service\_List\_For\_Workgroup\_5

http://SERVER1.DOMAIN/NOA\_Service\_List\_For\_Workgroup\_6

### User Identification

In order to take advantage of NOA functions, it is necessary to first enter a user name followed by a password. There are typically two types of user names: the personal name, and the group name. The group name contains a list of members that are allowed access to the group, whereas the personal name may be considered a special case of the group name which has no member. The file format with which user and password information is stored is not important. NOA systems provide an interface for an application program that will regardless of the file format utilized.

In one embodiment, the first line of a user database is a code which specifies the particular file format, or character encoding used for this file. The next line of the user database is a time stamp which represents the time and date on which the user database was last altered. The time stamp may appear in the following format:

{YYYYMMDDHHMMSS}

where YYYY represents the year, MM represents the month, DD represents the day, HH represents the hour, MM represents the number of minutes, and SS represents the number of seconds upon which the user database was last altered. In one

embodiment, the date and time are recorded in terms of Greenwich Mean Time (GMT).

After the time-stamp, the NOA user database contains a list of entries that represent users and groups. User entries contain an ID, a full name, a clear text password, and a list of groups of which the user is a member. In contrast, group entries contain a list of groups of which the user is a member, but do not contain a password or other information contained in a user entry. An exemplary six lines from a user database are listed below:

```
adminNOA:Administrator:adminpassword:
user1: User Name 1 :user1password:admin,group1,group2
user2: User Name 2 :user2password:group1
group1: Group Name 1:
group2: Group Name 2:
group3: Group Name 3:group2
```

Passwords are stored in clear text form on NOAs rather than being stored in encrypted form as is the usual practice in similar circumstances. This is done because individual passwords need to be reused under multiple password hashing schemes for some NOAs. Transfers of the user database between NOAs, however, are encrypted. Such an encryption mechanism should ensure that hosts masquerading as NOAs are not granted access without obtaining a security code of some sort. The particular encryption algorithm used is not important, as long as the devices in question use the same protocol to establish encryption keys.

Figure 8 illustrates a flow diagram of one embodiment of a password distribution routine. The user identification procedure which includes password distribution may be implemented on a number of devices. In a network

environment that lacks a designated administrator, user identification services are located on the same device as SNOA services. Since SNOA services are typically located on the Master server in an such a network environment, user services should also be located on the Master server. In administered network environments, user identification services may be located on a separate device, typically referred to as a user server.

Referring to Figure 8, a client connected to a NOA network requests a password list from a Master server using a CGI program named "noa\_request\_users" at processing block 800. At processing block 801, the Master server challenges the client NOA with a random number that was encrypted using the security code of the client NOA. This is accomplished using a CGI program named noa\_request\_key. The client NOA then decrypts the random number using its security code, adds 1 to the number, and reencrypts the resulting number in steps 802, 803 and 804 respectively. At processing block 805, the client NOA returns the reencrypted number to the Master server. At processing block 806, the server determines whether the number returned by client NOA is the number the server expected to have returned to it. If the number returned is not the expected number and is therefore not correct, the transaction is aborted for security purposes at processing block 815. If the number returned to the Master server by the client NOA is correct, however, the Master server encrypts the user database using the incremented number at processing block 807. The Master server subsequently POSTS the encrypted user database via HTTP, and invokes a CGI program named accept\_userdb at processing block 808. The client NOA decrypts the user database using the incremented random number at processing block 809 completing the database transfer routine. The client NOA now checks a time-stamp in the user database to determine whether the client NOA or the Master server has the most recent user database. If it is determined at processing block 811 that the client NOA

has the most recent copy of the user database, the client NOA sends the later copy of the user database to the Master server at processing block 812 by repeating steps 801-809 as herein described. The Master server then pushes the most recent database to all other client NOAs on the network at processing block 813 by repeating steps 801-812 as herein described. If it is determined at processing block 811 that the Master server has the most recent copy of the user database, there is no need for the client NOA to send its user database to the Master server. Master server then pushes its user database to all other client NOAs on the network by repeating steps 801-812.

Note that other password distribution routines may be used.

Whereas many alterations and modifications of the present invention will no doubt become apparent to a person of ordinary skill in the art after having read the foregoing description, it is to be understood that any particular embodiment shown and described by way of illustration is in no way intended to be considered limiting. Therefore, references to details of various embodiments are not intended to limit the scope of the claims which in themselves recite only those features regarded as essential to the invention.



## CLAIMS

What is claimed is:

1. A method of automatically initializing a first device on a network comprising:
  - requesting configuration information from a second device upon connecting the first device to the network;
  - delaying a period of time before deciding that no configuration information is available;
  - providing configuration services to said network if a response to said configuration information request is not received from said second device within said period of time;
  - providing said configuration services to said network if said first device has a higher priority than said second device.
  - continuously monitoring said network to detect a connection of an additional device to said network.
2. The method defined in claim 1, wherein said providing said configuration services comprises:
  - automatically determining a first network address;
  - automatically assigning a second network address;
  - automatically assigning a network name;
  - automatically correlating said first network address, said second network address, and said network name; and
  - recording said correlated first network address, said correlated second network address and said correlated network name in a table.

1 3. The method defined in claim 2, wherein said first network address comprises a  
2 media access control (MAC) address.

1 4. The method defined in claim 2, wherein said second network address comprises  
2 an Internet Protocol (IP) address.

1 5. The method defined in claim 2, wherein assigning said network name comprises:  
2 detecting a network name conflict;  
3 resolving said network name conflict; and  
4 recording a code in said table to indicate said network name conflict.

1 6. The method defined in claim 2, wherein said network name is suggested by said  
2 first device.

1 7. The method defined in claim 1, wherein said period of time is varied so as to  
2 prevent race conditions.

1 8. A method of automatically allocating network information comprising:  
2 assigning a network address to a device;  
3 assigning a network name to said device;  
4 correlating said network name with said network address; and  
5 recording said correlated network name and said correlated network address  
6 in a table to allow a user to refer to said device by said assigned network  
7 name independent of said assigned network address.

1 9. The method defined in claim 8, wherein assigning said network name comprises  
2 resolving a network name conflict when said network name is already in use.

1 10. The method defined in claim 9, wherein said network name is suggested by said  
2 device.

1 11. The method defined in claim 8, wherein said network address is assigned using  
2 Dynamic Host Configuration Protocol (DHCP).

1 12. A method of automatically initializing a network comprising:  
2 automatically assigning an address to a device on said network;  
3 automatically assigning a network name to said device on said network;  
4 automatically supplying user and group information across said network; and  
5 automatically determining service capability of said device on said network.

1 13. The method defined in claim 12, wherein supplying user and group  
2 information comprises:

3 detecting when said device is connected to said network;  
4 sending a first user and group list to said device in response to said device  
5 connecting to said network;  
6 said device comparing said first user and group list with a second user and  
7 group list resident on said device; and  
8 said device determining whether said first user and group list or said second  
9 user and group list is more recent;  
0 receiving a more recent user and group list from said device;  
1 updating said user and group information to reflect said more recent user and  
2 group list; and  
3 propagating said updated user and group information throughout said  
4 network.

1 14. The method defined in claim 13, wherein a time-stamp is used to determine  
2 whether said first user and group list or said second user and group list is more  
3 recent.

1 15. The method defined in claim 13, wherein updating said user and group  
2 information comprises recording said more recent user and group list in clear text.

1 16. The method defined in claim 15, wherein updating said user and group  
2 information comprises encrypting said user and group information prior to  
3 transmission across said network.

1 17. The method defined in claim 12, further comprising:  
2 correlating said network address and said network name; and  
3 storing said correlated network address and said correlated network name in a  
4 table.

1 18. The method defined claim 12, wherein said network name is suggested by said  
2 device.

1 19. The method defined in claim 12, wherein HyperText Transfer Protocol (HTTP) is  
2 used to exchange information.

1 20. The method defined in claim 12, wherein Service Location Protocol (SLP) is  
2 used to exchange information.

1 21. A network comprising:

2 a first device coupled to said network, said first device configured to  
3 automatically  
4 request a first network address;  
5 receive said first network address from a second device coupled to said  
6 network;  
7 provide a network configuration if said first network address is not  
8 received from said second device;  
9 determine its priority level on said network if said first network  
0 address is received from said second device; and  
1 provide said network configuration if said priority level is higher than  
2 a second priority level of said second device.

1 22. The network defined in claim 21, wherein said first device is a networked office  
2 appliance.

1 23. The network defined in claim 21, wherein the first device is further configured  
2 to automatically:

3 assign a second network address;  
4 assign a network name;  
5 correlate said second network address with said network name; and  
6 record said correlated second network address and said correlated network  
7 name in a table.

1 24. The network defined in claim 23, wherein said table further comprises:  
2 a Media Access Control (MAC) address; and  
3 a code to indicate a conflict with said network name.

1 25. The network defined in claim 23, wherein said first and second network  
2 addresses comprise Internet Protocol (IP) addresses.

1 26. A network comprising:

2 a first device configured to  
3 assign an address to a second device on said network;  
4 assign a network name to said second device on said network;  
5 supply user and group information across said network; and  
6 determine service capability of said second device on said network.

1 27. The network defined in claim 26, wherein said user and group information  
2 comprises:

3 a list comprising  
4 a user name;  
5 a password;  
6 a group name having a second list of members allowed access to said  
7 group;  
8 a time stamp; and  
9 a character encoding code.

1 28. The network defined in claim 27, wherein said password is recorded in clear text.

29. A method for automatically discovering services comprising:

gathering individual service lists;  
creating a master service list accessible by network clients;  
accessing the master service list for a first network device to determine if a  
5 second network device provides a desired service.

30. The method defined in claim 29 further comprising pushing clients to a resource locator to inform the clients of services provided by a new device.

## ABSTRACT OF THE DISCLOSURE

A dynamically configurable network architecture comprising networked office appliances which provide network addressing, network naming, service discovery, and user identification in one system. The network architecture provides automatic configuration services for unadministered networks while being automatically adaptable within administered environments.





22-141 50 SHEETS  
22-142 100 SHEETS  
22-144 200 SHEETS

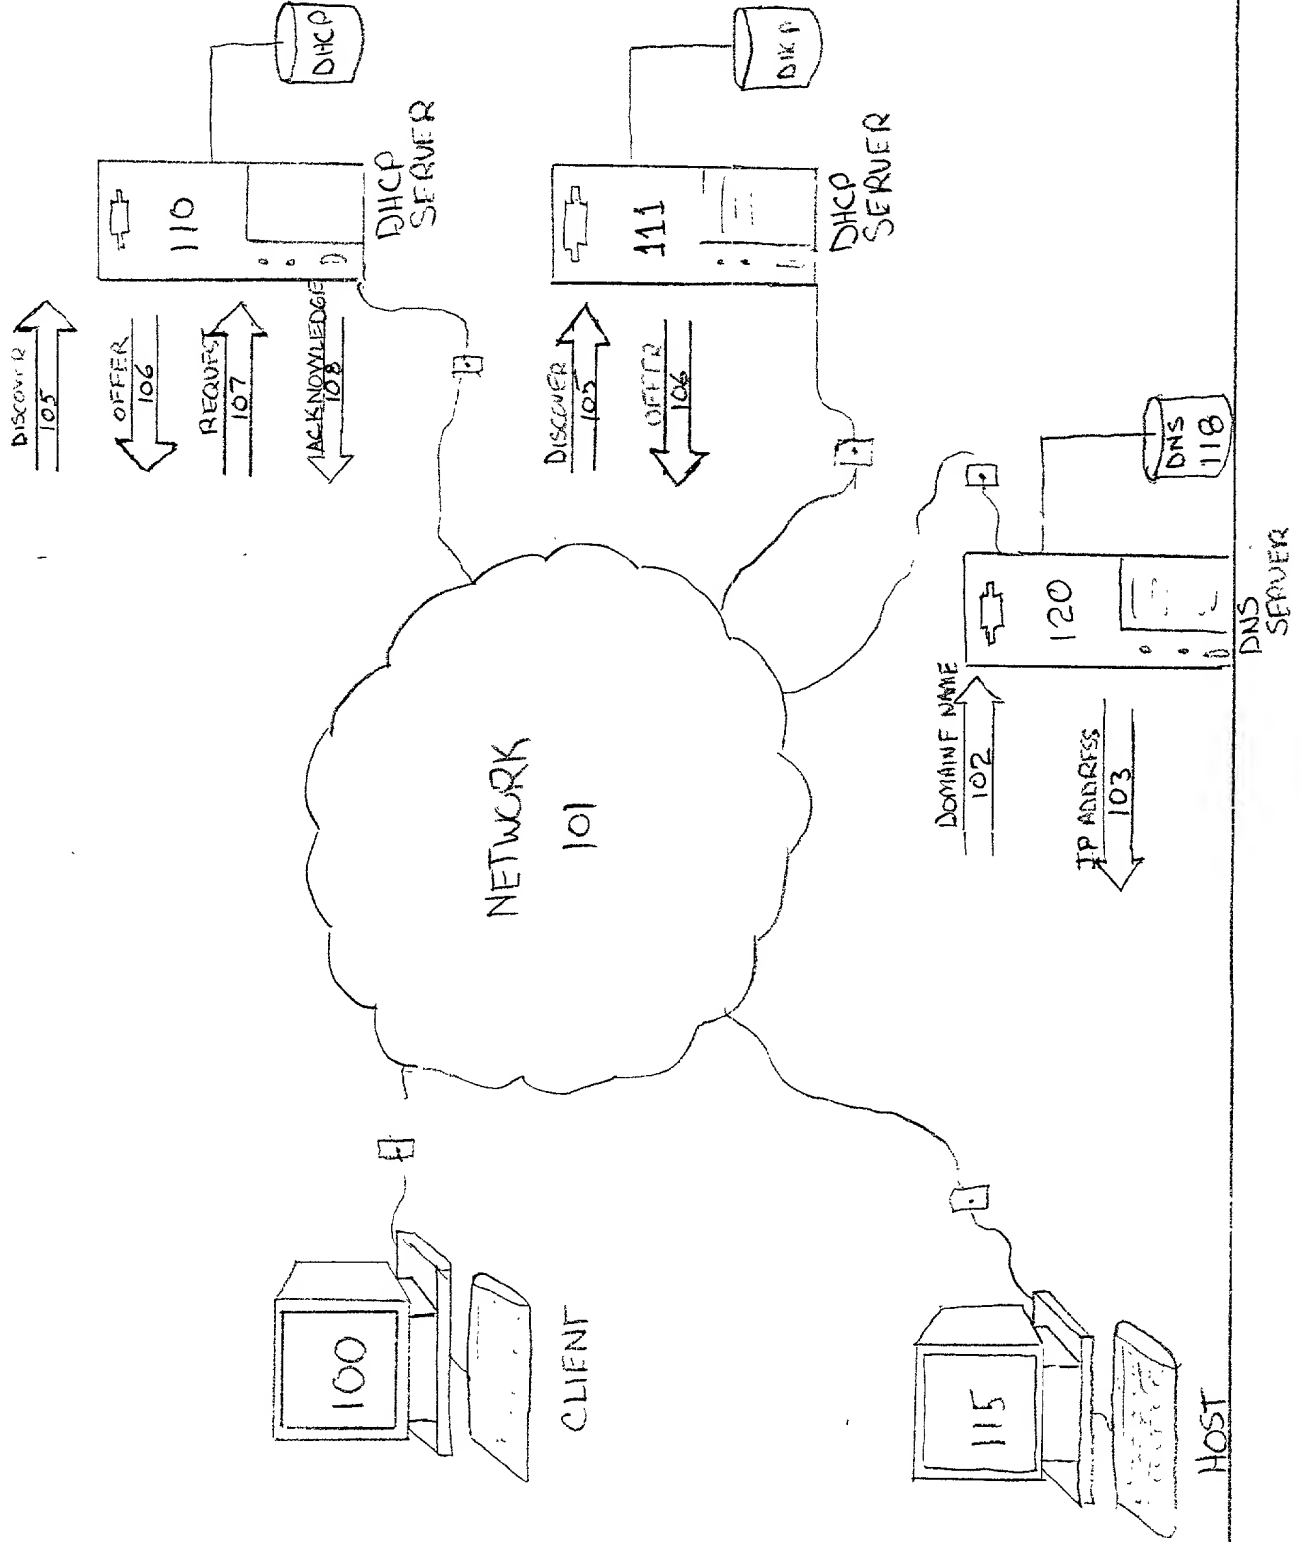


FIGURE 1

PRIOR  
ART

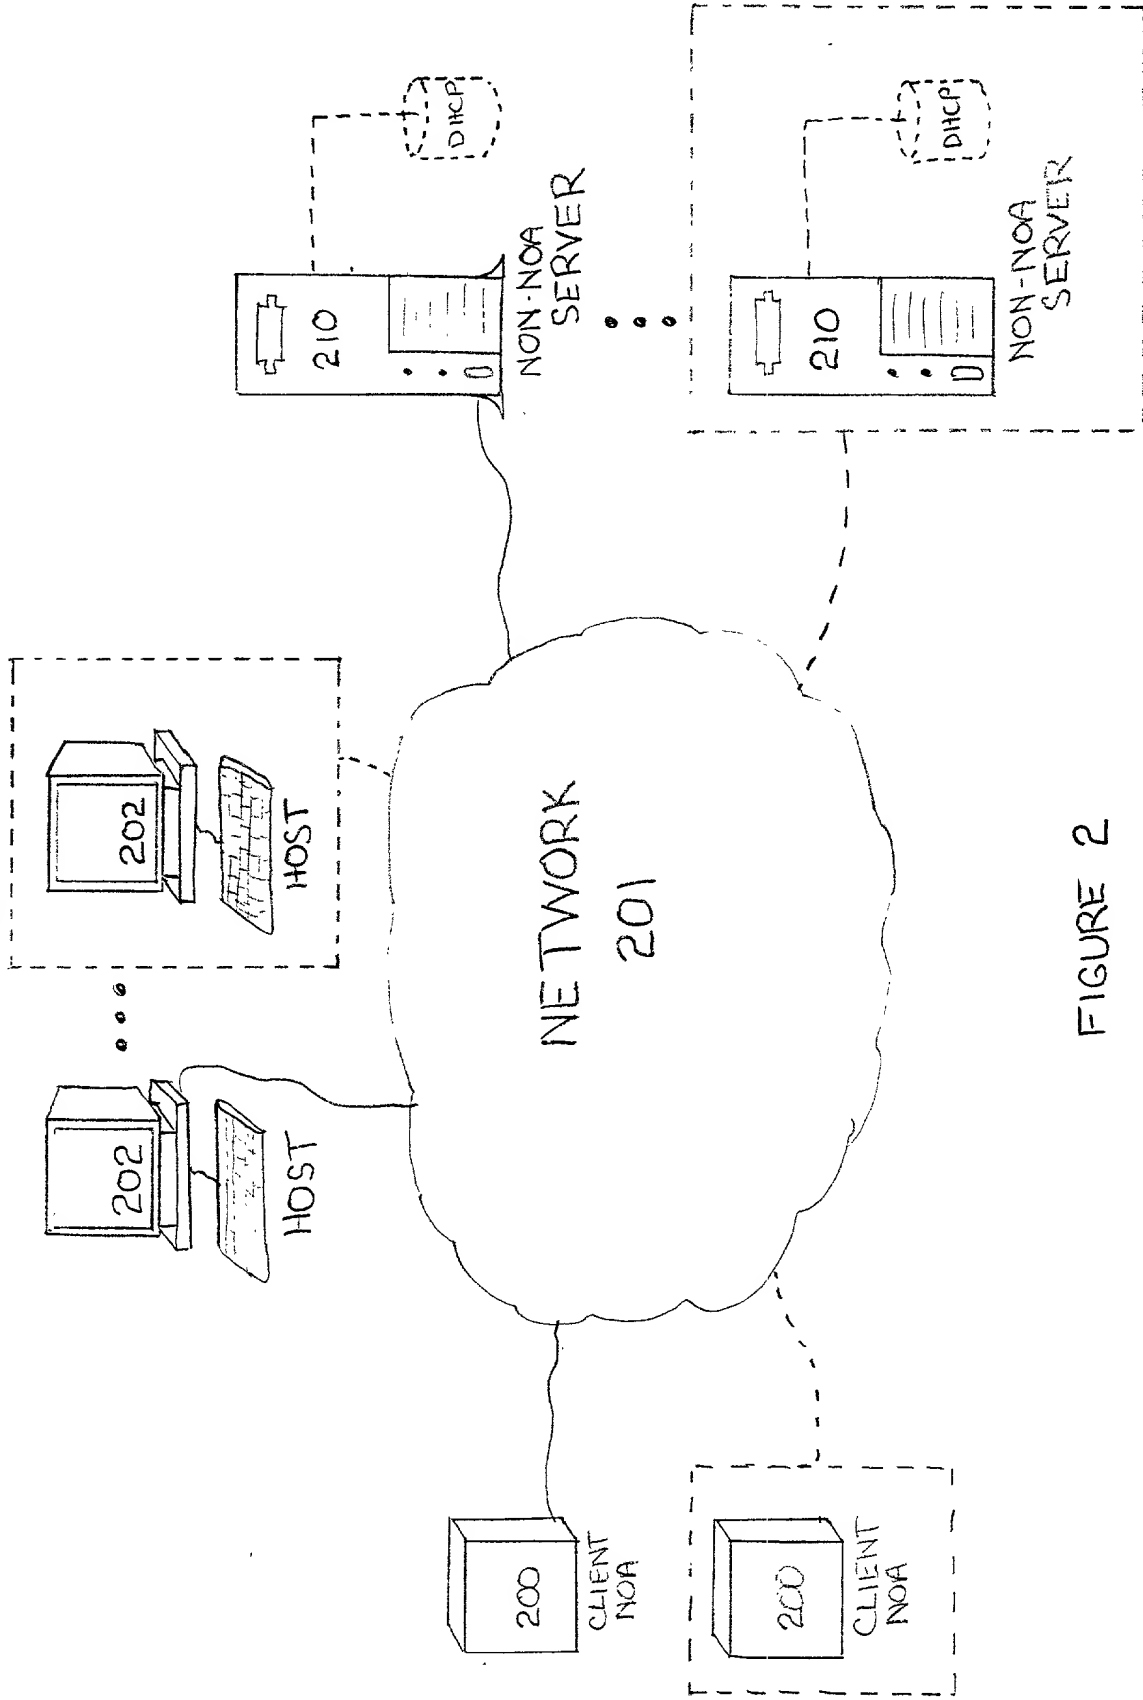


FIGURE 2



SECRET

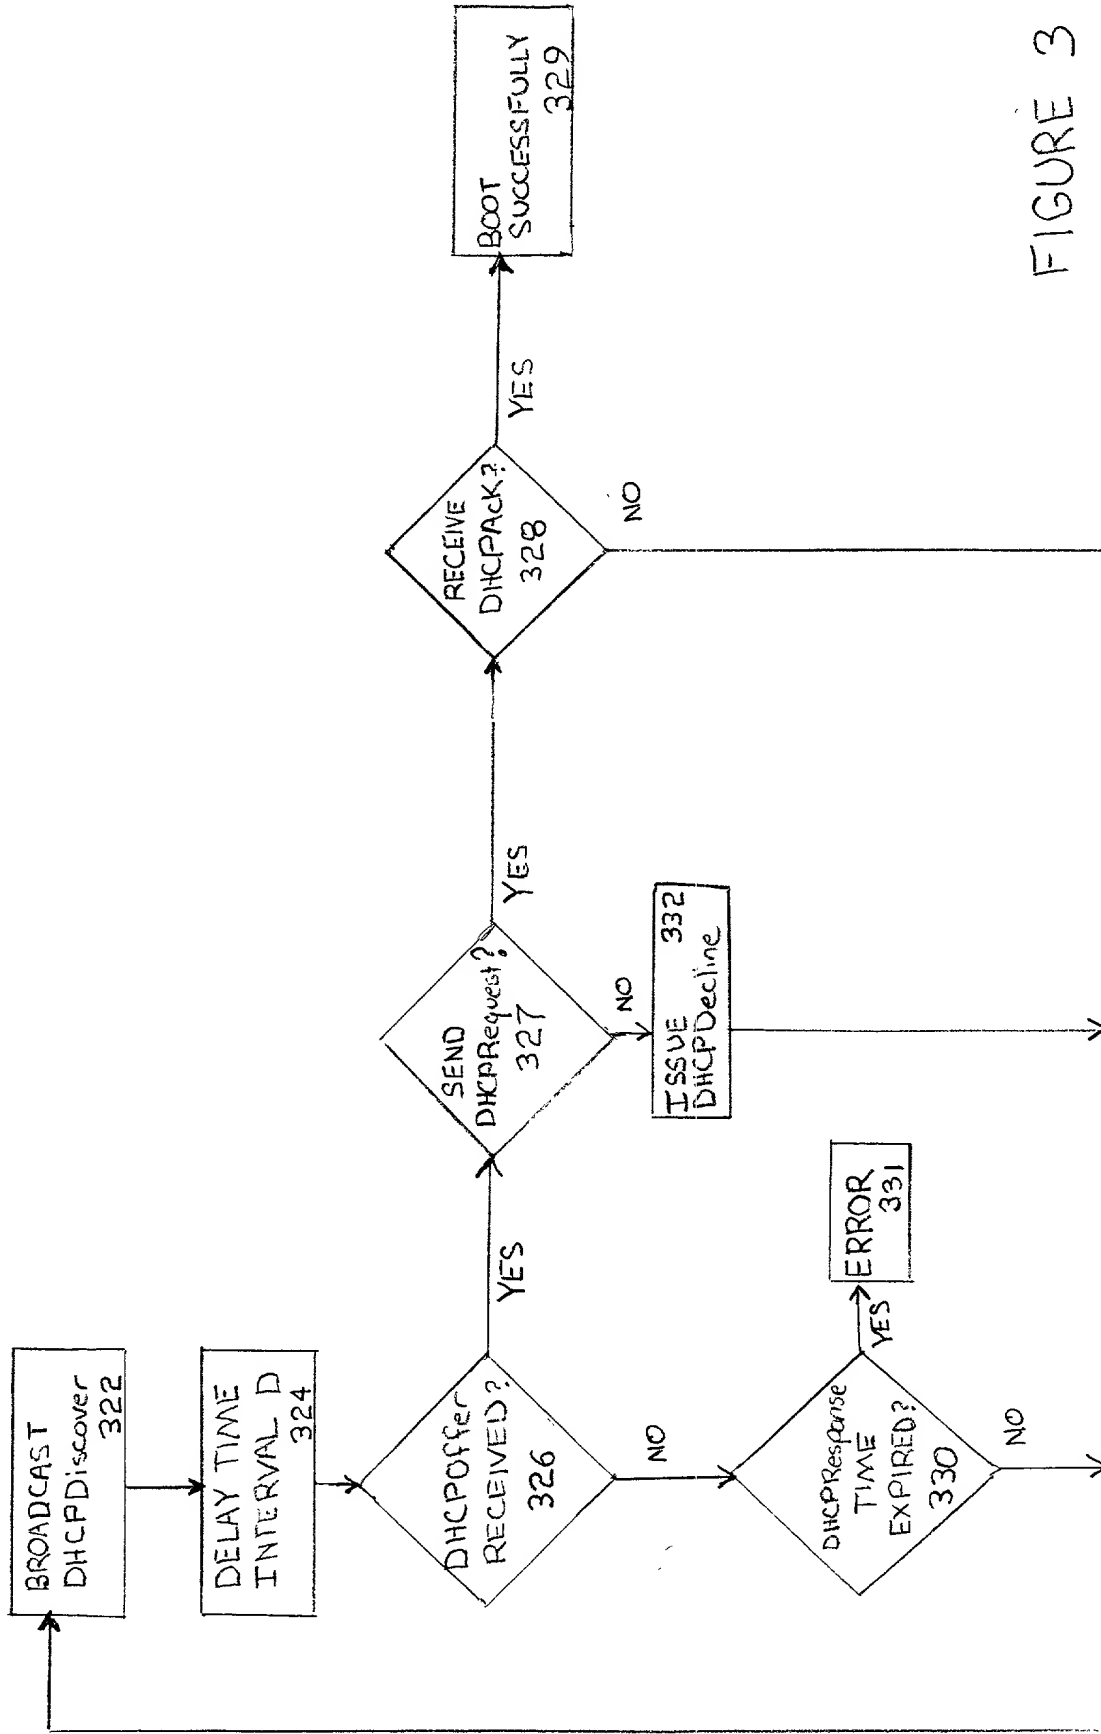


FIGURE 3

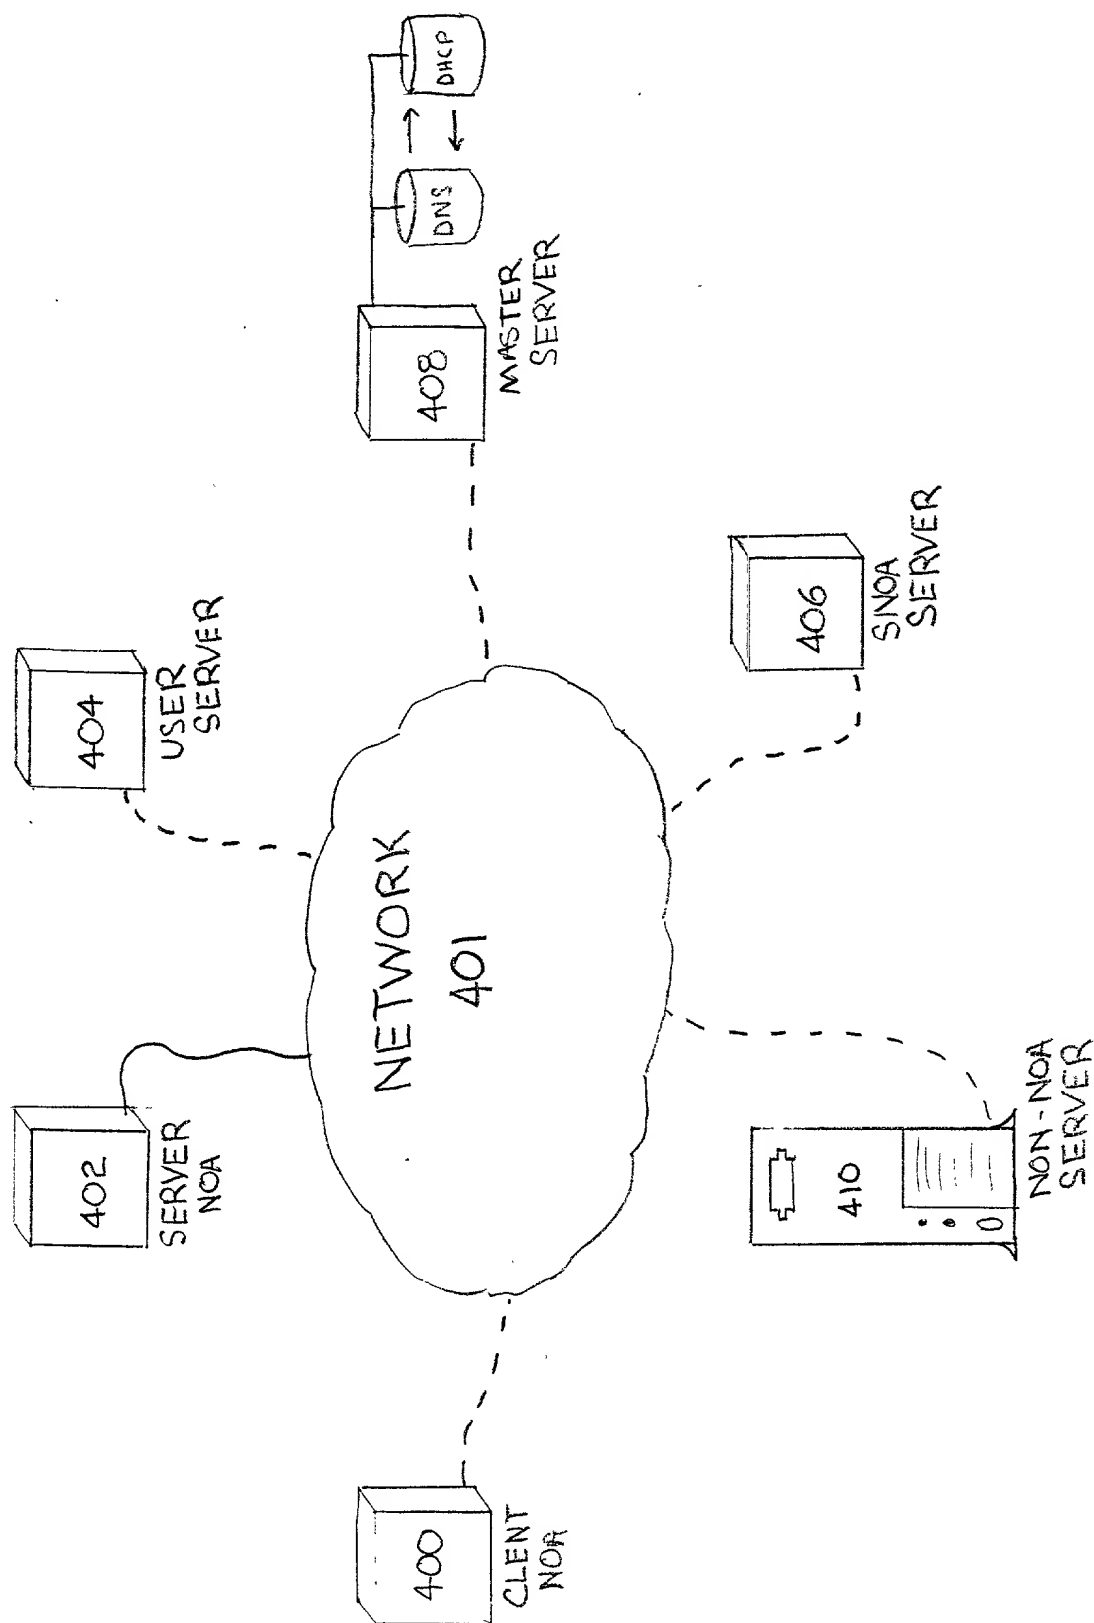


FIGURE 4



22-141 50 SHEETS  
22-142 100 SHEETS  
22-144 200 SHEETS

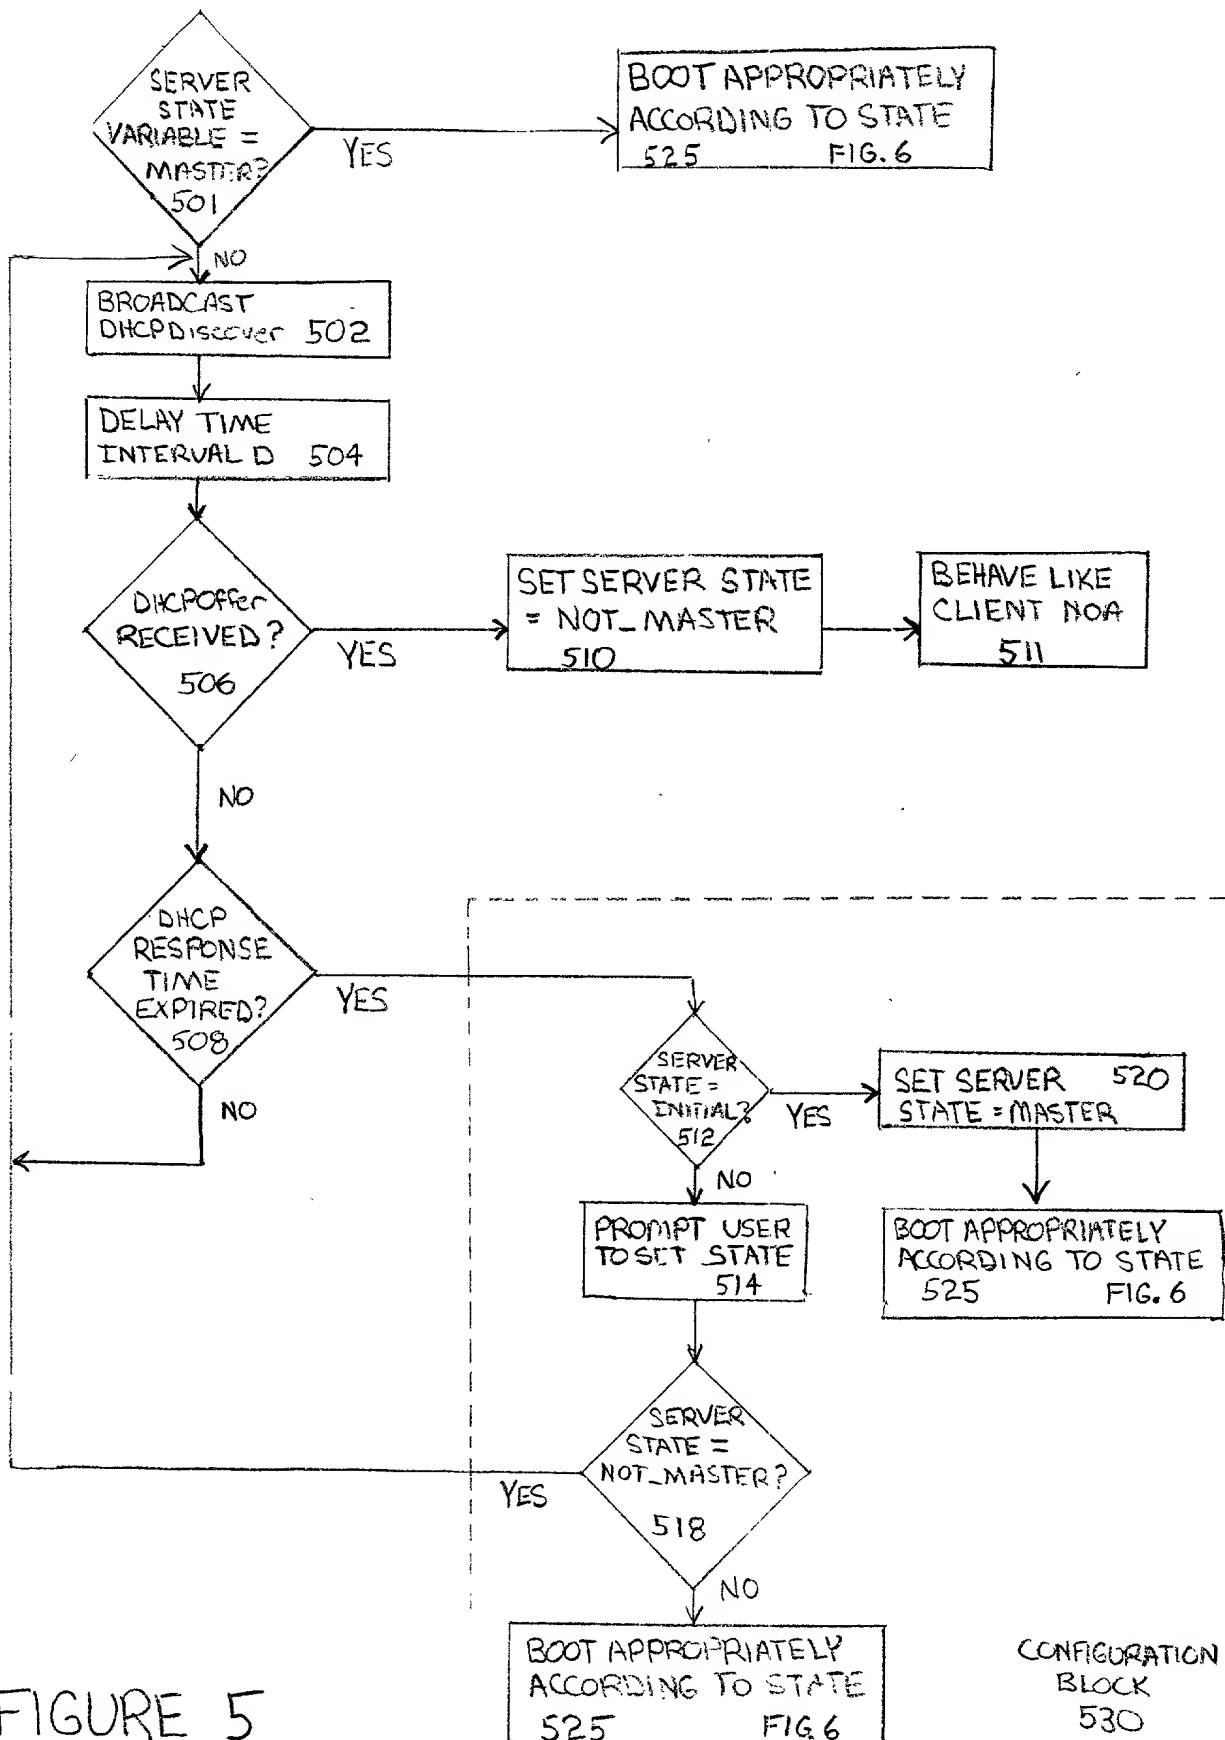


FIGURE 5



22-141 50 SHEETS  
22-142 100 SHEETS  
22-144 200 SHEETS

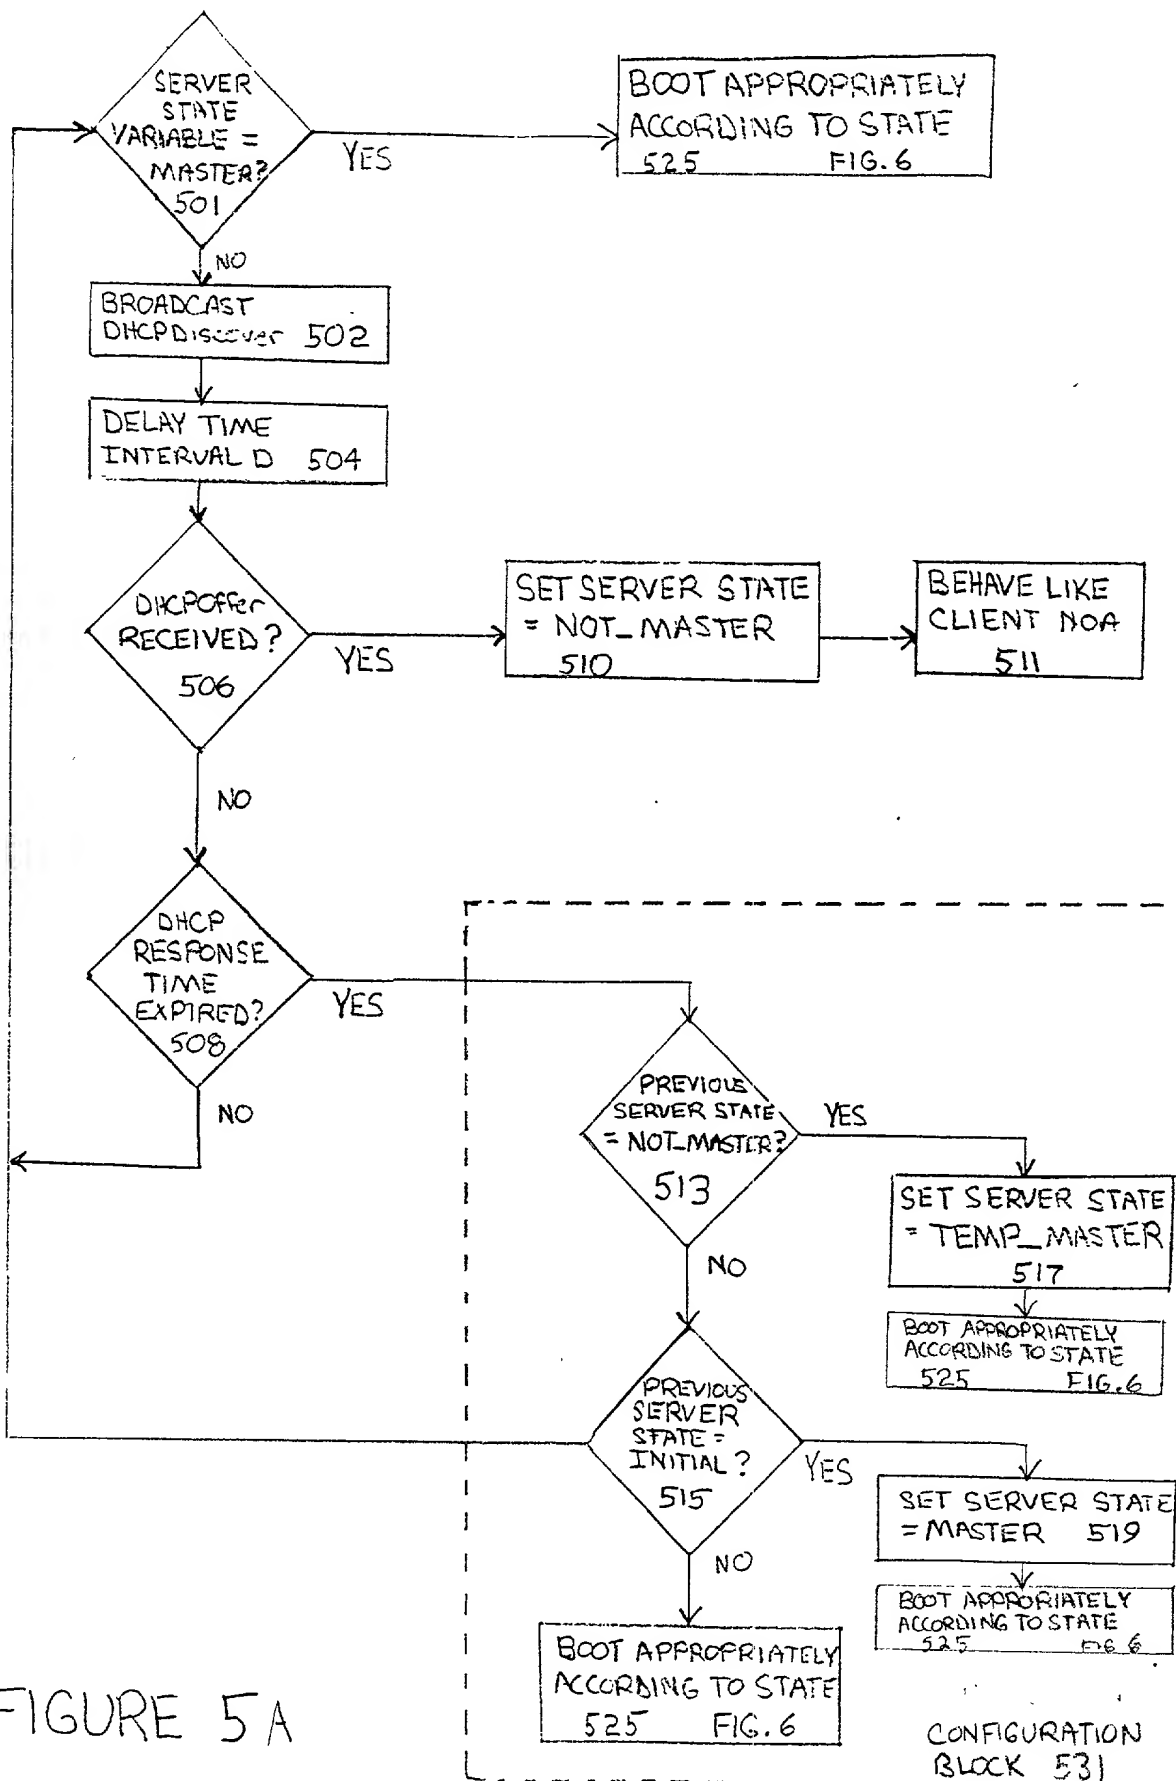


FIGURE 5A


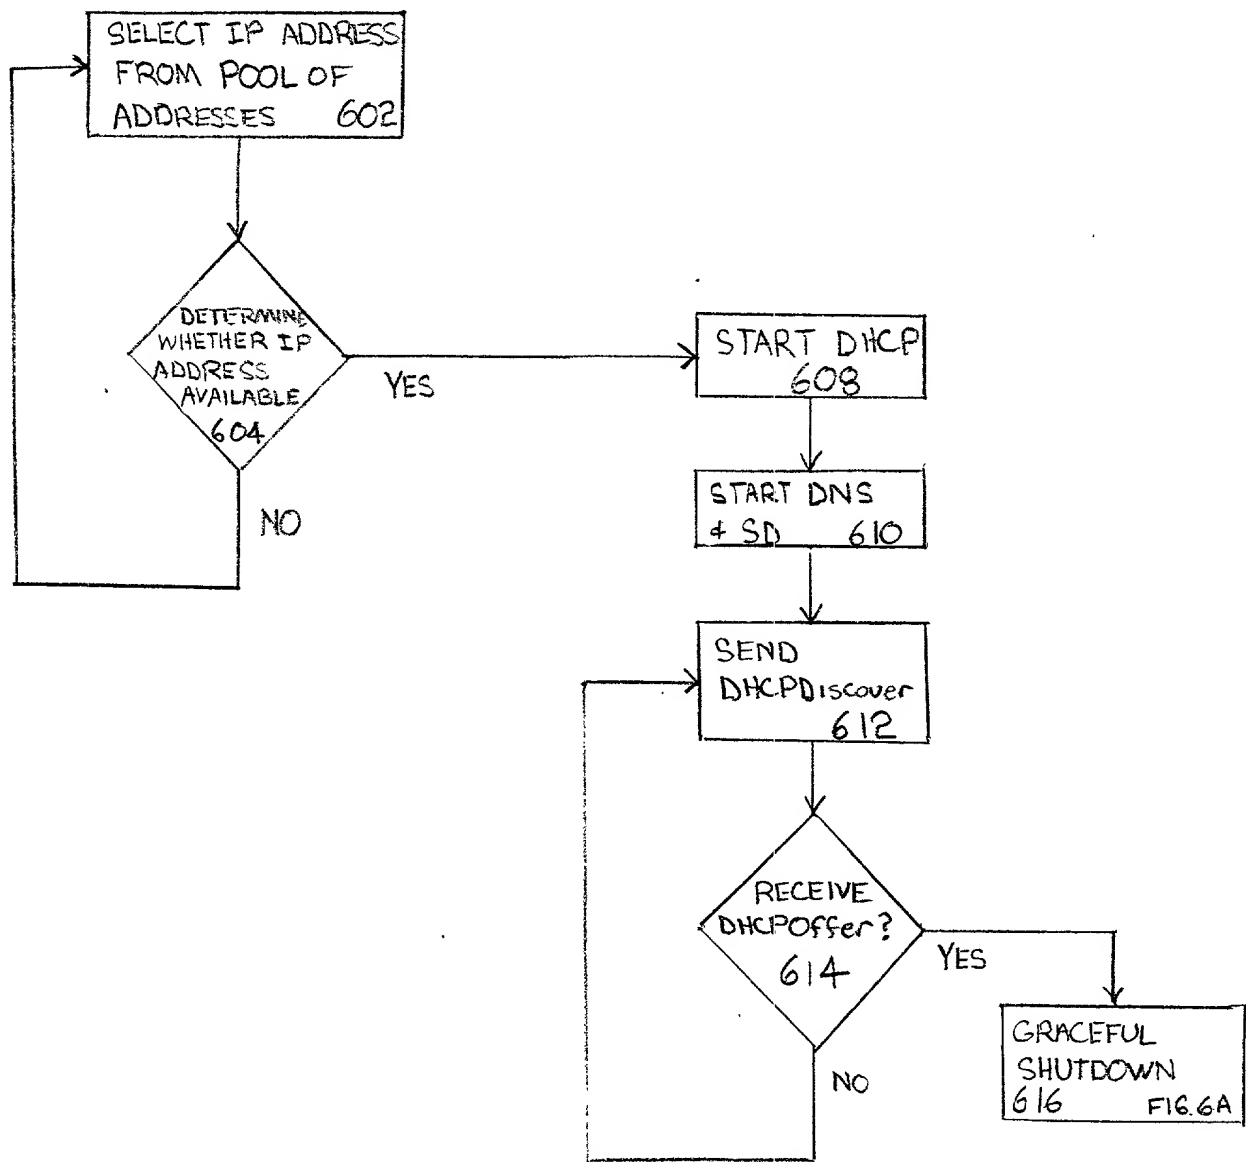


FIGURE 6



**FIG. 6A**

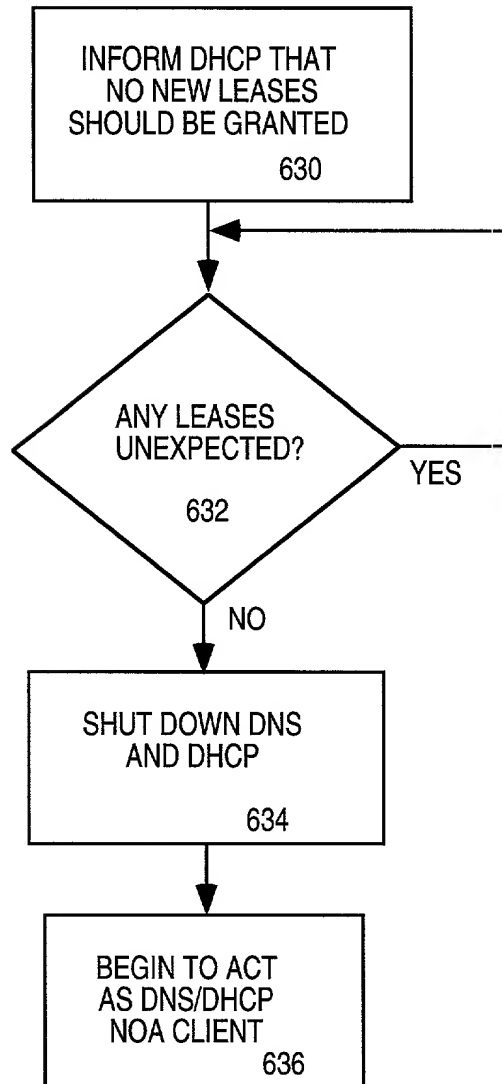

11-131 50 SHEETS  
11-132 100 SHEETS  
11-133 200 SHEETS



800 444 2266

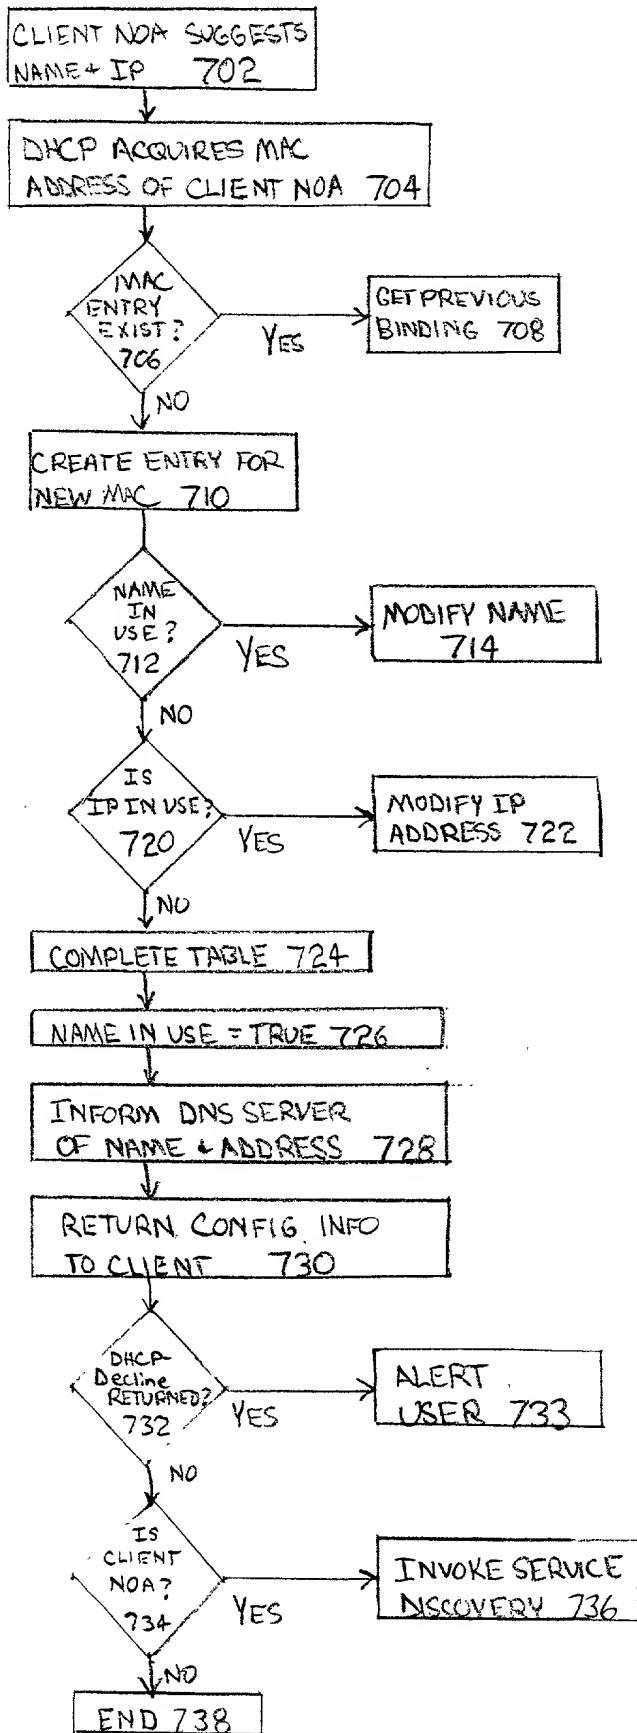


FIGURE 7



SECRET

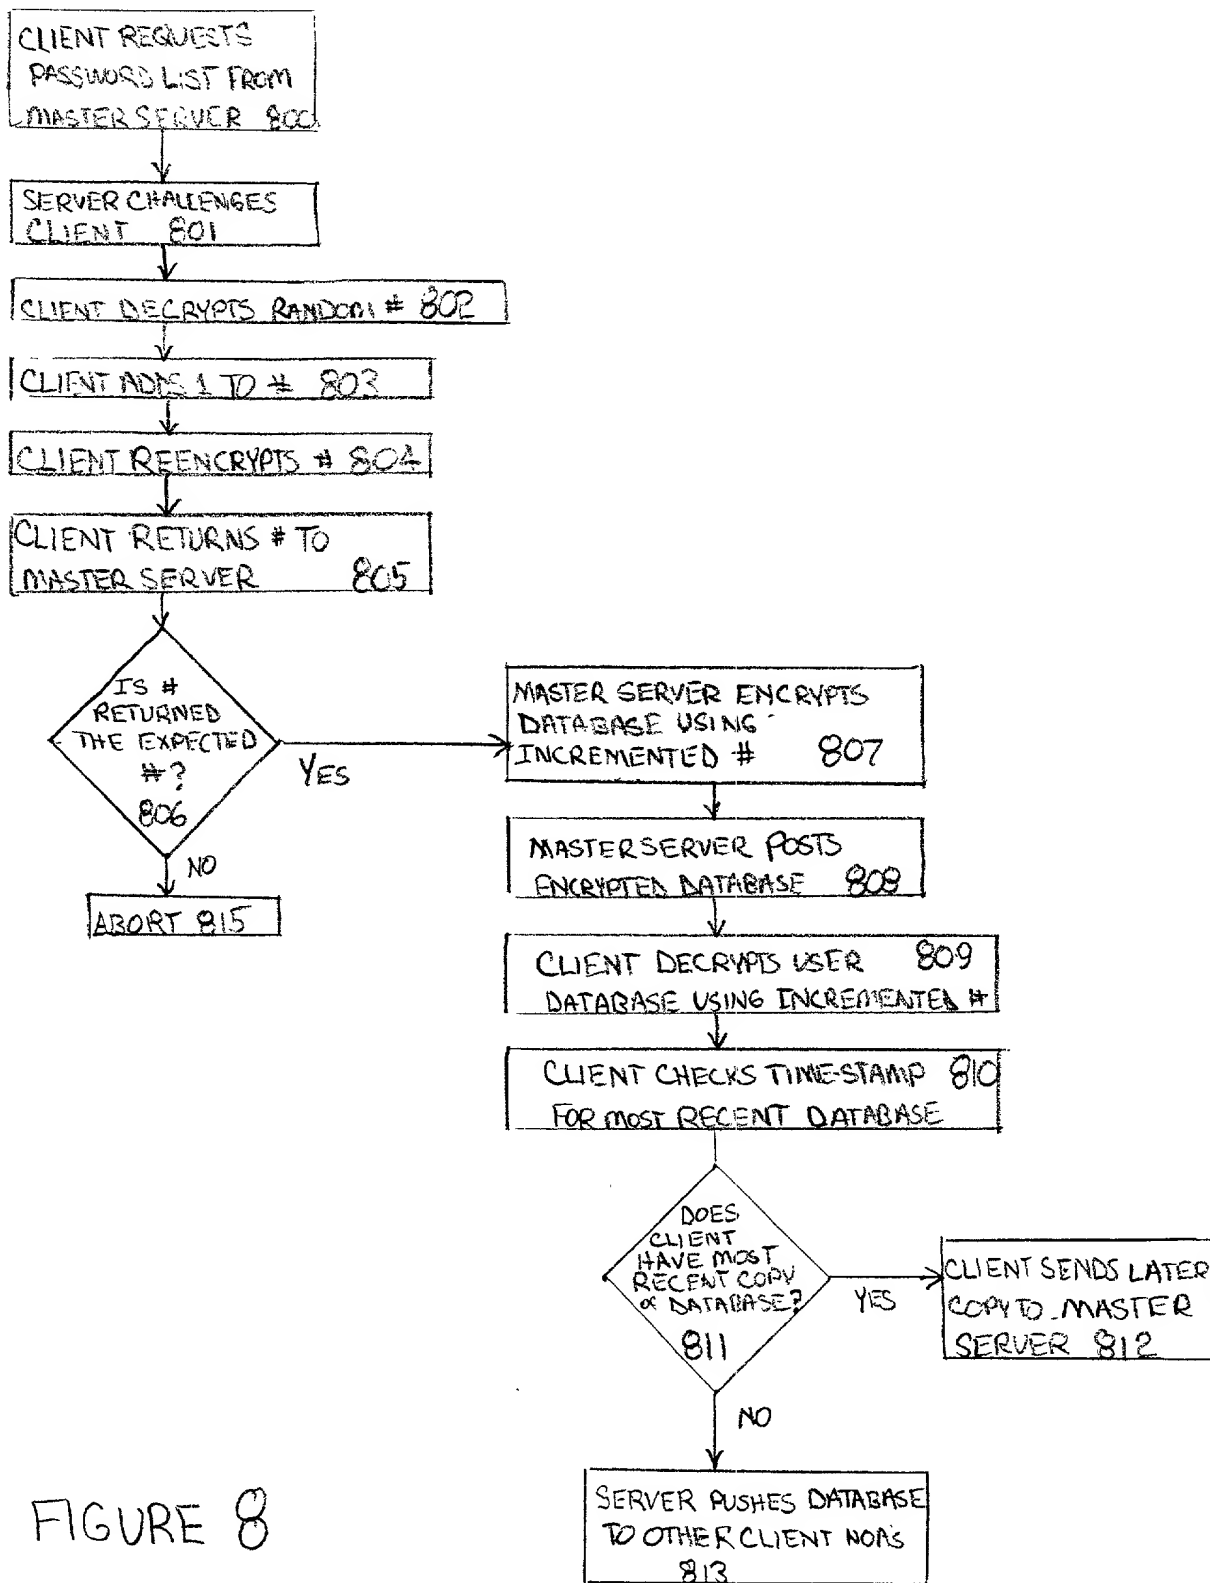


FIGURE 8

**DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or any original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**Method And Apparatus For Automatic Network Configuration**

the specification of which

☒ is attached hereto.  
☐ was filed on \_\_\_\_\_ as  
 United States Application Number \_\_\_\_\_  
 or PCT International Application Number \_\_\_\_\_  
 and was amended on \_\_\_\_\_  
 (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

**Prior Foreign Application(s)****Priority Claimed**

| (Number) | (Country) | (Day/Month/Year Filed) | (Yes) | (No)  |
|----------|-----------|------------------------|-------|-------|
| _____    | _____     | _____                  | _____ | _____ |
| (Number) | (Country) | (Day/Month/Year Filed) | (Yes) | (No)  |
| _____    | _____     | _____                  | _____ | _____ |
| (Number) | (Country) | (Day/Month/Year Filed) | (Yes) | (No)  |
| _____    | _____     | _____                  | _____ | _____ |

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below:

|                      |               |
|----------------------|---------------|
| _____                | _____         |
| (Application Number) | (Filing Date) |
| _____                | _____         |
| (Application Number) | (Filing Date) |

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

|                            |                        |   |
|----------------------------|------------------------|---|
| _____<br>(Application No.) | _____<br>(Filing Date) | _____<br>(Status -- patented, pending, abandoned) |
| _____<br>(Application No.) | _____<br>(Filing Date) | _____<br>(Status -- patented, pending, abandoned) |

I hereby appoint Farzad E. Amini, Reg. No. P42,261; Aloysius T. C. AuYeung, Reg. No. 35,432; William Thomas Babbitt, Reg. No. 39,591; Jordan Michael Becker, Reg. No. 39,602; Bradley J. Bereznak, Reg. No. 33,474; Michael A. Bernadicou, Reg. No. 35,934; Roger W. Blakely, Jr., Reg. No. 25,831; Gregory D. Caldwell, Reg. No. 39,926; Kent M. Chen, Reg. No. 39,630; Lawrence M. Cho, Reg. No. 39,942; Yong S. Choi, Reg. No. P43,324; Thomas M. Coester, Reg. No. 39,637; Roland B. Cortes, Reg. No. 39,152; Barbara Bokanov Courtney, Reg. No. P42,442; William Donald Davis, Reg. No. 38,428; Michael Anthony DeSanctis, Reg. No. 39,957; Daniel M. De Vos, Reg. No. 37,813; Tarek N. Fahmi, Reg. No. 41,402; Richard Leon Gregory, Jr., P42,607; James Y. Go, Reg. No. 40,621; David R. Halvorson, Reg. No. 33,395; Thomas A. Hassing, Reg. No. 36,159; Eric Ho, Reg. No. 39,711; Willmore F. Holbrow III, Reg. No. P41,845; George W. Hoover II, Reg. No. 32,992; Eric S. Hyman, Reg. No. 30,139; Dag H. Johansen, Reg. No. 36,172; Stephen L. King, Reg. No. 19,180; Michael J. Mallie, Reg. No. 36,591; Paul A. Mendonsa, Reg. No. P42,879; Darren J. Milliken, P42,004; Thinh V. Nguyen, P42,034; Kimberley G. Nobles, Reg. No. 38,255; Michael A. Proksch, Reg. No. P43,021; Ronald W. Reagin, Reg. No. 20,340; Babak Redjaian, P42,096; James H. Salter, Reg. No. 35,668; William W. Schaal, Reg. No. 39,018; James C. Scheller, Reg. No. 31,195; Anand Sethuraman, Reg. No. P43,351; Charles E. Shemwell, Reg. No. 40,171; Maria McCormack Sobrino, Reg. No. 31,639; Stanley W. Sokoloff, Reg. No. 25,128; Allan T. Sponseller, Reg. No. 38,318; Judith A. Szepesi, Reg. No. 39,393; Edwin H. Taylor, Reg. No. 25,129; George G. C. Tseng, Reg. No. 41,355; Lester J. Vincent, Reg. No. 31,460; John Patrick Ward, Reg. No. 40,216; Stephen Warhola, Reg. No. P43,237; Ben J. Yorks, Reg. No. 33,609; and Norman Zafman, Reg. No. 26,250; my attorneys; and Robert Andrew Diehl, Reg. No. 40,992; and Edwin A. Sloane, Reg. No. 34,728; my patent agents, of BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP, with offices located at 12400 Wilshire Boulevard, 7th Floor, Los Angeles, California 90025, telephone (310) 207-3800, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**Full Name of Sole/First Inventor** (given name, family name) Toru Matsuda

**Inventor's Signature** \_\_\_\_\_ **Date** \_\_\_\_\_

**Residence** \_\_\_\_\_ **Citizenship** \_\_\_\_\_  
(City, State) (Country)

**P. O. Address** \_\_\_\_\_

\_\_\_\_\_

**Full Name of Second/Joint Inventor** (given name, family name) Kurt Piersol

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ (City , State) Citizenship \_\_\_\_\_ (Country)

P. O. Address \_\_\_\_\_

\_\_\_\_\_

**Full Name of Third/Joint Inventor** (given name, family name) Shinsuke Teramura

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ (City , State) Citizenship \_\_\_\_\_ (Country)

P. O. Address \_\_\_\_\_

\_\_\_\_\_

**Full Name of Fourth/Joint Inventor** (given name, family name) Akio Urabe

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ (City , State) Citizenship \_\_\_\_\_ (Country)

P. O. Address \_\_\_\_\_

\_\_\_\_\_

**Full Name of Fifth/Joint Inventor** (given name, family name) Tatsuya Inagaki

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ (City , State) Citizenship \_\_\_\_\_ (Country)

P. O. Address \_\_\_\_\_

\_\_\_\_\_

Title 37, Code of Federal Regulations, Section 1.56  
Duty to Disclose Information Material to Patentability.

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

(1) Prior art cited in search reports of a foreign patent office in a counterpart application, and

(2) The closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made or record in the application, and

(1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or

(2) It refutes, or is inconsistent with, a position the applicant takes in:

(i) Opposing an argument of unpatentability relied on by the Office, or

(ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

(1) Each inventor named in the application;

(2) Each attorney or agent who prepares or prosecutes the application; and

(3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.